

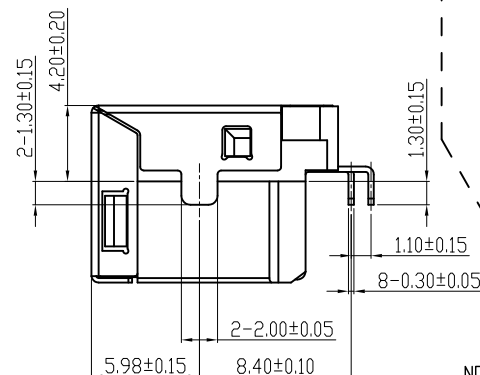
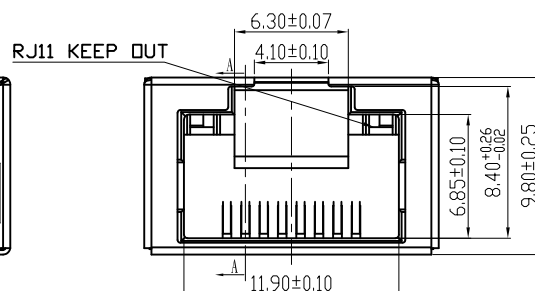

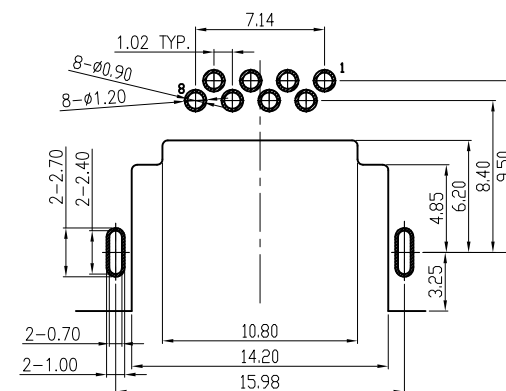
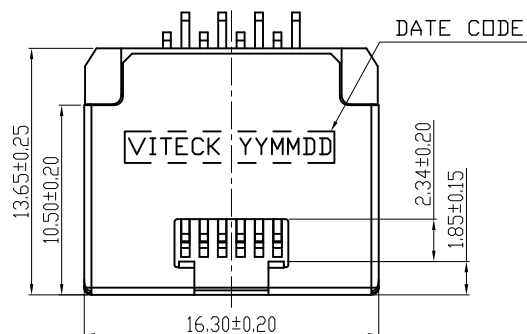


| REV | DESCRIPTION | ECN/ECR | DATE       | DRAWN BY |
|-----|-------------|---------|------------|----------|
|     | 新訂圖面        | —       | 10/14/2014 | 陳昊       |

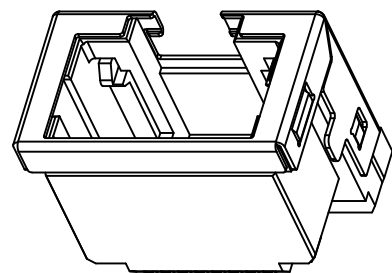

RECOMMENDED PCB LAYOUT  
TOLERANCE:±0.05mm  
RECOMMENDED PCB THICKNESS:1.20of1.00±0.05

NOTES:  
1.MATERIAL:  
1-1:HOUSING:PA10T+30%GF(VICNYL R630NH);UL 94V-0,  
COLOR:BLACK  
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.30mm  
TREATMENT:  
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN  
ON SOLDER TAIL,ALL OVER NI 30u" MIN.  
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN  
ON SOLDER TAIL,ALL OVER NI 30u" MIN.  
1-3:SHELL:SUS(201);T=0.25mm,TREATMENT:50u" NI  
2.SPECIFICATIONS:  
2-1.VOLTAGE RATING:150VAC MAX.  
2-2.CURRENT RATING:1.5AMP MAX.  
2-3.INSULATION RESISTANCE:1000MΩ MIN. AT 500V DC.  
2-4.DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC 60HZ 1MINUTE.  
2-5.DURABILITY:5000 CYCLES.  
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.  
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.  
2-8.MATES WITH MODULAR PLUG CONFORMING TO FCC  
PART 68,SUBPART F.

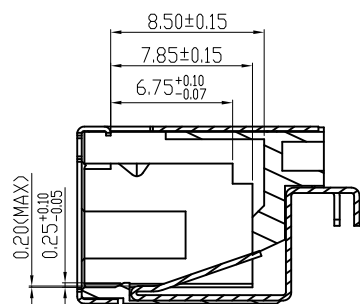

SECTION A-A

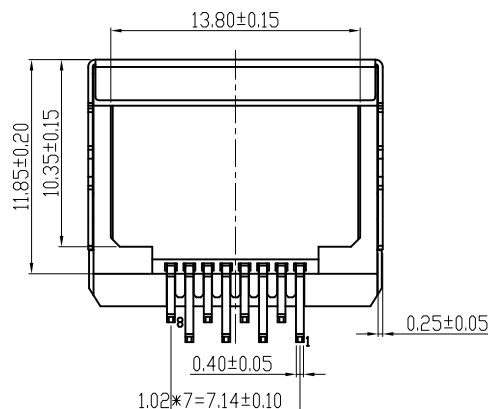


TABLE:

|            |             |     |               |     |
|------------|-------------|-----|---------------|-----|
| 30μ        | *****       | -02 | WHITE NI      | YES |
| G/F        | *****       | -01 | WHITE NI      | YES |
| AU PLATING | PART NUMBER | -XX | SHELL PLATING | HF  |

東莞世華電子有限公司  
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)  
地址:東莞市塘廈鎮諸佛嶺178工業區  
TEL:0769-87910020-1 FAX:0769-87910210

|             |    |         |  |
|-------------|----|---------|--|
| DRAWN BY    | 陳昊 | ITEM    |  |
| CHECKED BY  |    | PART NO |  |
| APPROVED BY |    |         |  |

MINI RJ45 PHONE JACK  
(板上4.2mm)無LED

CD4521032001-XX

|                     |       |            |
|---------------------|-------|------------|
| ANGLE PROJECTION    | UNIT  | mm         |
|                     | SCALE | 1:1        |
| TOLERANCE           | DATE  | 10/14/2014 |
| .X±0.20<br>.XX±0.10 |       |            |