

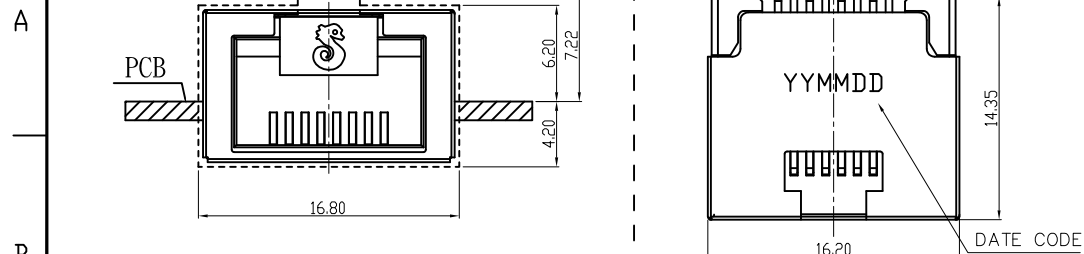
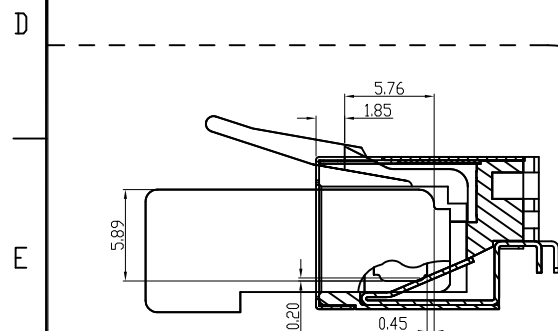





REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
	新訂圖面	—	04/17/2014	陳 昊




SUGGESTION OPENING

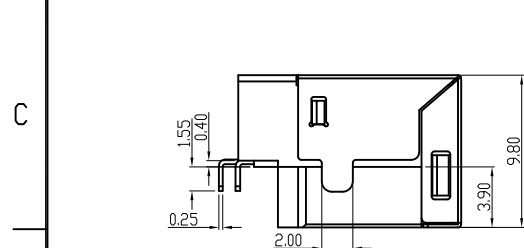

MATE RJ45 PLUG

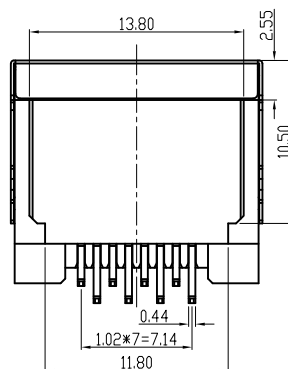

MATE RJ11 PLUG

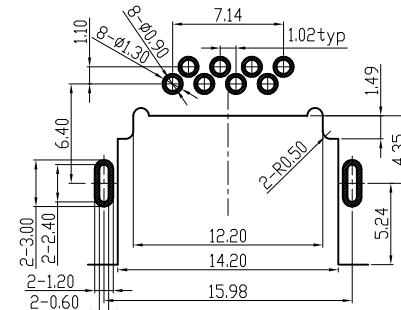

RECOMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMENDED PCB THICKNESS:1.20±0.05

NOTES:

- 1-MATERIAL:
1-1-HOUSING:PA9T(GP2450);UL 94V-0,
COLOR:BLACK
1-2-TERMINAL:PHOSPHOR BRONZE(C5210R);T=0.30±0.05mm
TREATMENT:1U"G/50U"MATTE TIN
OR 30U"G/50U"MATTE TIN
1-3-SHELL:SUS(201);T=0.20±0.05mm,TREATMENT:50U" NI
- 2-ELECTRICAL CHARACTERISTICS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3-INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4-DIELECTRIC WITHSTANDING VOLTAGE:
1000V AC 60HZ 1MINUTE.
2-5-DURABILITY:5000 CYCLES.
2-6-OPERATING TEMPERATURE:-30°C TO+70°C.
2-7-FOR REFLOW SOLDERING LEAD-FREE PROCESS.
2-8-MATES WITH MODULAR PLUG CONFORMING TO FCC
PART 68,SUBPART F.

Part Number(客戶)	AU
2RJ3061-008211F	G/F
—	30u"

TABLE:

30μ	CD4531012011	-04	WHITE NI	YES
G/F	CD4531012011	-03	WHITE NI	YES
30μ	CD4531012011	-02	BLACK NI	YES
G/F	CD4531012011	-01	BLACK NI	YES
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF


東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	陳 昊	ITEM	MINI RJ45 PHONE JACK(板上5.9mm)
CHECKED BY		PART NO	CD4531012011-XX
APPROVED BY		TOLERANCE	

ANGLE PROJECTION

UNIT

mm



SCALE

1:1

.X±0.30
.XX±0.20

DATE

04/17/2014