

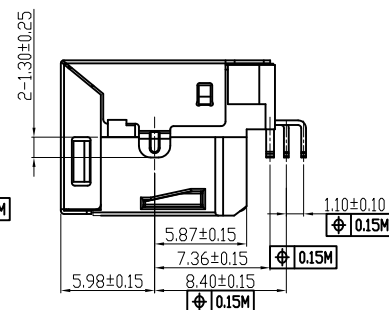
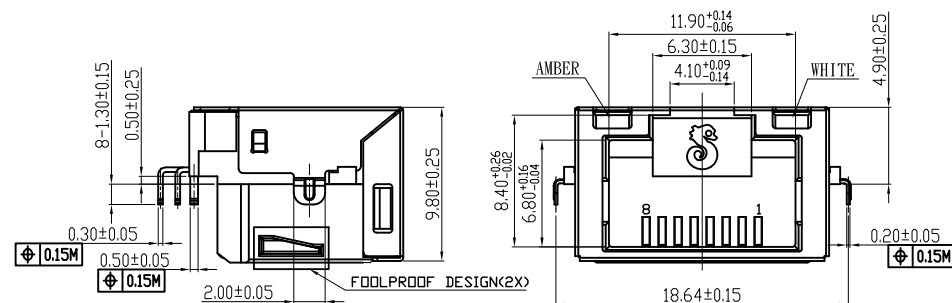
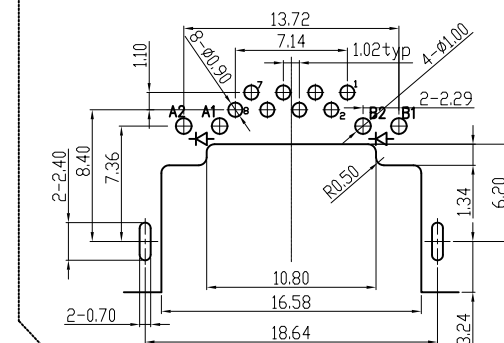



REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
△△	新訂圖面	—	02/22/2017	張美華
△△	修改字碼位置及大小	ECR	04/09/2019	左胜胜
△△	修改字碼位置	ECR	08/02/2019	左胜胜

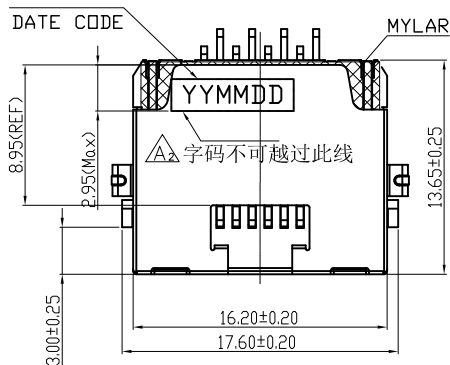

NOTES:
1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0,
COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.30mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:LED:WHITE/AMBER,TREATMENT:TIN
1-5:DEFEND :LCP(KE6808);UL 94V-0,COLOR:BLACK
1-6:MYLAR:YELLOW
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.


Part Number(客戶)	AU
2RJ1697-021311F	G/F
2RJ1697-021411F	30u"

TABLE:

30μ"	CD4531062003	-02	WHITE NI	YES
G/F	CD4531062003	-01	WHITE NI	YES
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF

LED ELECTRICAL CHARACTERISTIC

NODE	COLOR	WAVELENGTH	FORWARD CURRENT
A1(+) A2(-)	AMBER	584-594nm	If=20mA
B1(+) B2(-)	WHITE		If=20mA

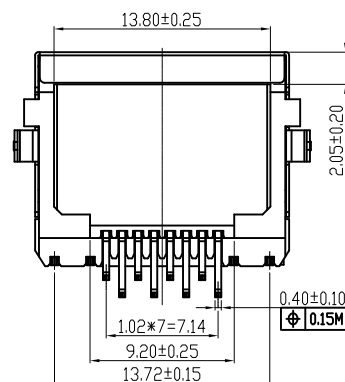

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	左胜胜	ITEM
CHECKED BY		
APPROVED BY		PART NO

MINI RJ45 PHONE JACK + 柵欄
(板上4.9mm 二)453專用

CD4531062003-XX

ANGLE PROJECTION	UNIT	mm
SCALE	DATE	
.X±0.20 .XX±0.10		