
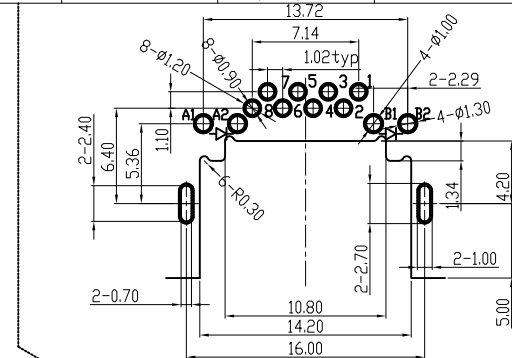







RoHS
Compliant

Halogen Free


REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A0	新訂圖面	—	02/26/2018	鍾 杭
B0	工程變更, 增加STAND OFF	ECN	03/19/2019	左 勝 勝
B1	修改字碼位置及大小	ECR	04/09/2019	左 勝 勝

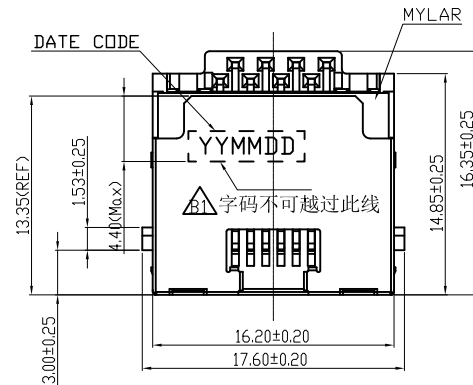

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMMENDED PCB THICKNESS:1.20±0.05

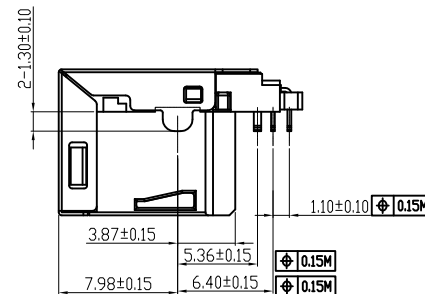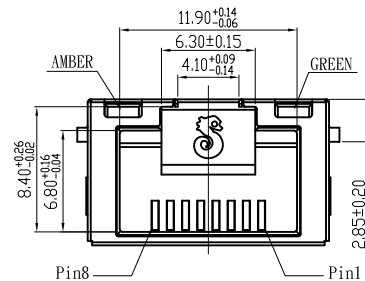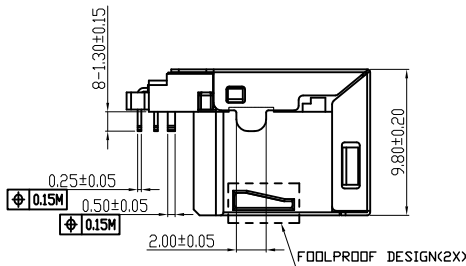

- NOTES:
- 1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH)/PA4T;UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
 - 1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:LED:GREEN/AMBER,TREATMENT:TIN
 - 1-5:STOPPLE:LCP(E6808);UL 94V-0,COLOR:BLACK
 - 1-6:DEFEND :LCP(E6808);UL 94V-0,COLOR:BLACK
 - 1-6:MYLAR:YELLOW
 - 2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.



3.6mm尺寸隨彈高,高度變動
電鍍區域示意圖

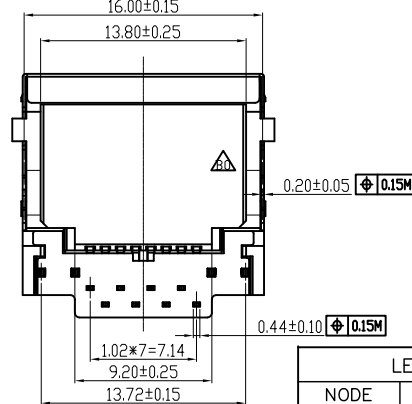


TABLE:

30μ"	CD4531062014	-02	WHITE NI	YES
G/F	CD4531062014	-01	WHITE NI	YES
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF

LED ELECTRICAL CHARACTERISTIC

NODE	COLOR	———	WAVELENGTH	FORWARD CURRENT
A1(+) A2(-)	AMBER	A1  A2	585-597nm	If=20mA
B1(+) B2(-)	GREEN	B1  B2	564-577nm	If=20mA

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY 左勝勝
CHECKED BY
APPROVED BY

ITEM MINI RJ45 PHONE JACK(板上2.85mm)+柵欄
PART NO CD4531062014-XX

ANGLE PROJECTION
UNIT mm
SCALE 1:1
TOLERANCE .X±0.20
.XX±0.10
DATE 04/09/2019