
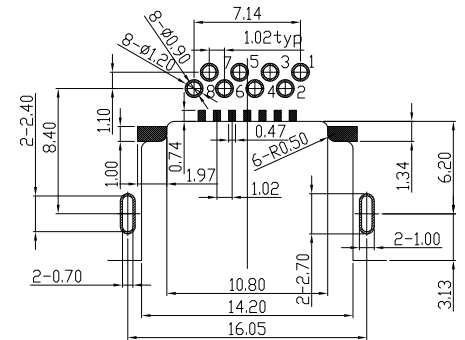

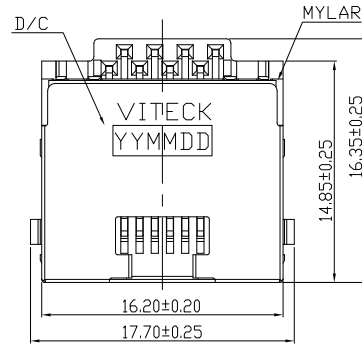






RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A	新訂圖面	—	12/01/2016	胡久量



RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMMENDED PCB THICKNESS:1.20±0.05

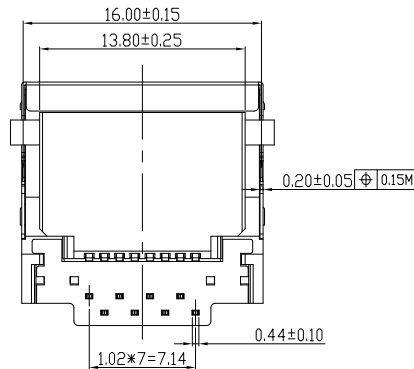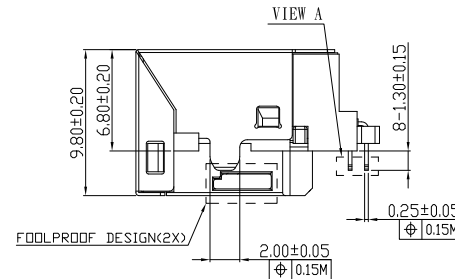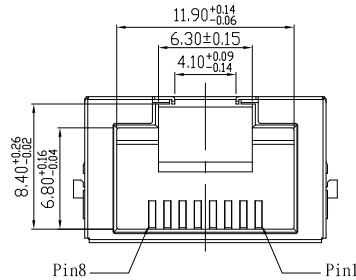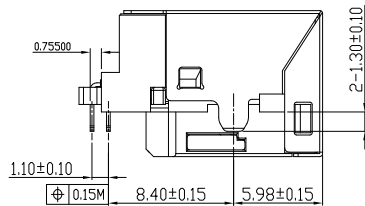

NOTES:
1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:STOPPLE:LCP(E6808);UL 94V-0,COLOR:BLACK
1-5:DEFEND :LCP(E6808);UL 94V-0,COLOR:BLACK
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

Part Number(凡準)	AU
RJN-032-1N08HG	G/F
RJN-032-1N08H6	30u"

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	胡久量	ITEM
CHECKED BY		
APPROVED BY		PART NO

MINI RJ45 PHONE JACK(板上6.80mm)
無LED

CD4521052011-XX

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
TOLERANCE	.X±0.30 .XX±0.20	DATE
		12/01/2016