
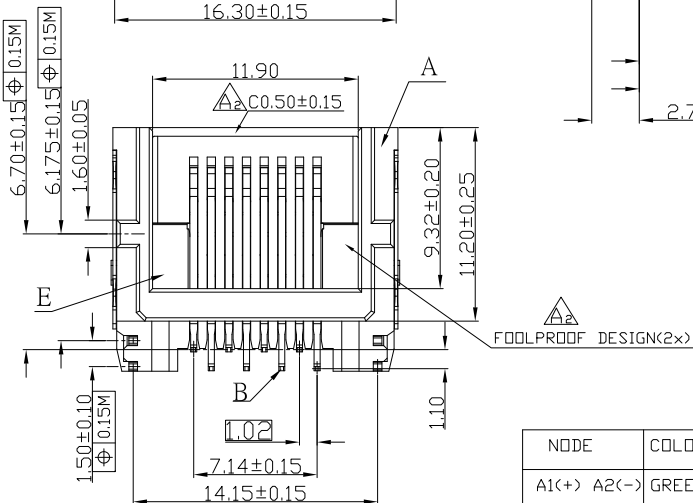
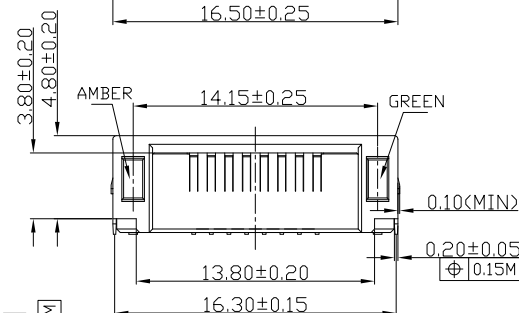




RoHS
Compliant

Halogen Free



REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A1	新訂圖面	—	07/11/2017	鐘 航
A2	修改電鍍規格	ECR	08/11/2017	鐘 航
A3	修正示意圖,修正PCB尺寸	ECR	04/02/2018	鐘 航

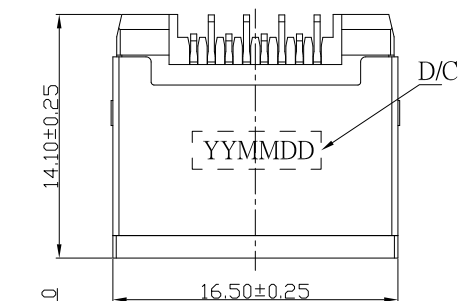

NODE	COLOR	
A1(+)	A2(-)	GREEN
B1(+)	B2(-)	AMBER

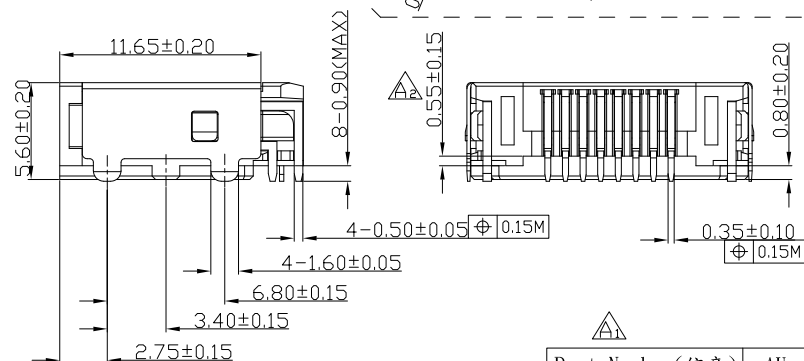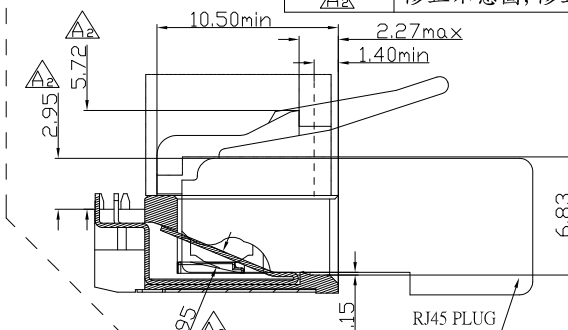

Part Number(信音)	AU
2RJ1748-001211F	G/F

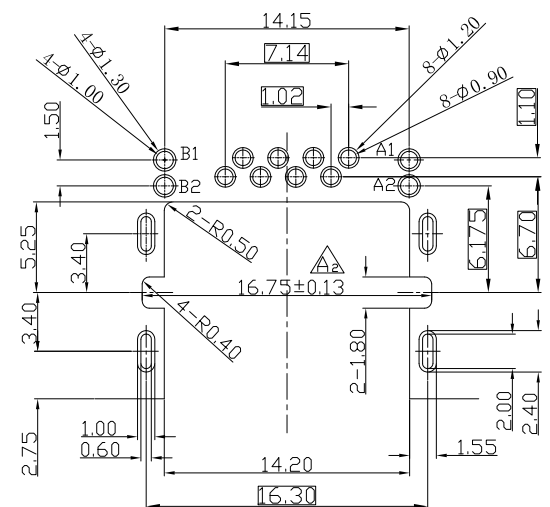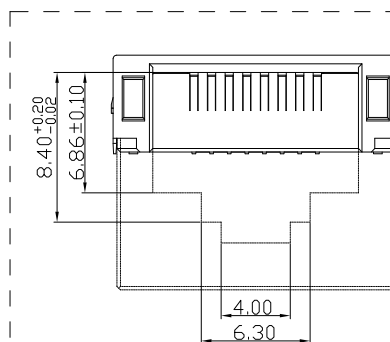

RECOMMENDED PCB LAYOUT
TOP VIEW: TOL:±0.05mm
PCB THICKNESS:1.00±0.05

- NOTES:
- 1.MATERIAL:
1-1:HOUSING:PA4T+35%GF(VICNYL R635NH);UL 94V-0,
COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:
GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
 - 1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI MIN
1-4:LED:AMBER/GREEN,TREATMENT:TIN
1-5:DEFEND:LCP(E6808);UL 94V-0,
COLOR:BLACK
 - 2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO +70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	鐘 航	ITEM	半截式RJ45 PHONE JACK(板上4.8mm 二)
CHECKED BY		PART NO	CD4531062011-XX
APPROVED BY			

半截式RJ45 PHONE JACK(板上4.8mm 二)

CD4531062011-XX

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
TOLERANCE	DATE	04/02/2018