

RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A0	新訂圖面	—	11/26/2015	唐忠洪
B0	工程變更, 增加Stand Off	ECN	04/02/2019	左勝勝
B1	修改字碼位置及大小	ECR	04/09/2019	左勝勝

A



B

C


D

E

F

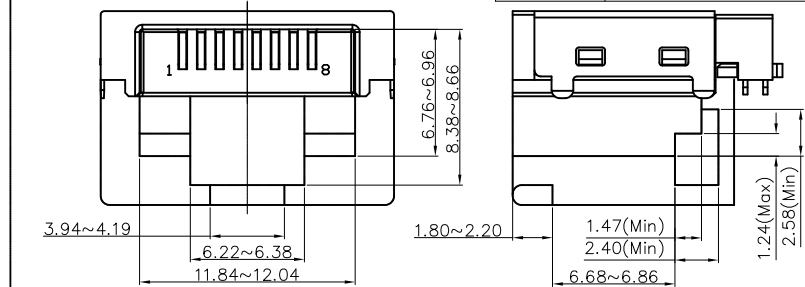
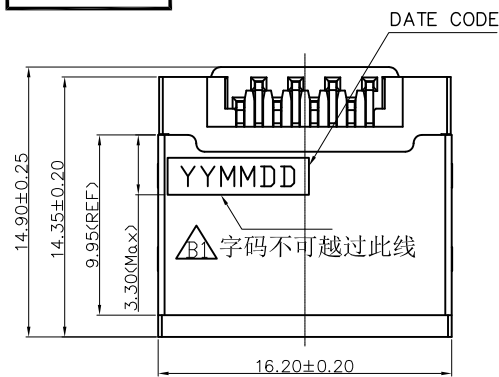


Conn. W/ Opening Base Drawing

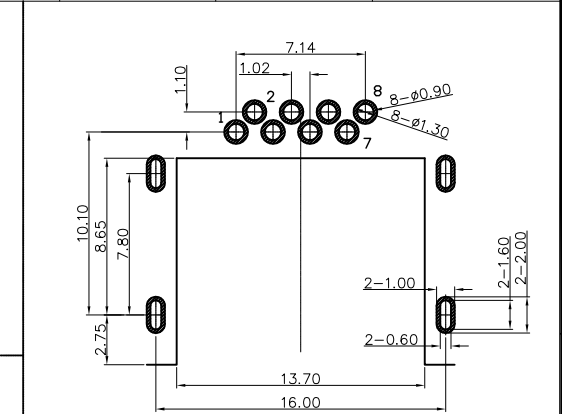

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm

NOTES:
1.MATERIAL:
1-1:HOUSING:PA4T(TX1)/PA10T+35%GF(VICNYL R635NH);UL 94V-0,
COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:DEFEND:LCP(E6808);UL 94V-0,
COLOR:BLACK
1-5:CAP:LCP(E6808);UL 94V-0,
COLOR:BLACK
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:1000MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

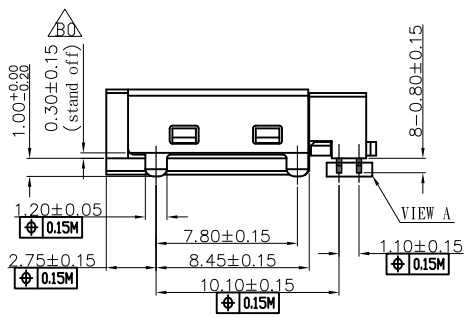

Part Number(客戶)	AU
2RJ1754-000111F	G/F
2RJ1754-000211F	30u"

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	左胜胜	ITEM	半截式 RJ45 PHONE JACK(板上3.8mm)	ANGLE PROJECTION		UNIT	mm
CHECKED BY					SCALE	1: 1	
APPROVED BY		PART NO	CD4531042016-XX	TOLERANCE	.X±0.20 .XX±0.10	DATE	04/09/2019