

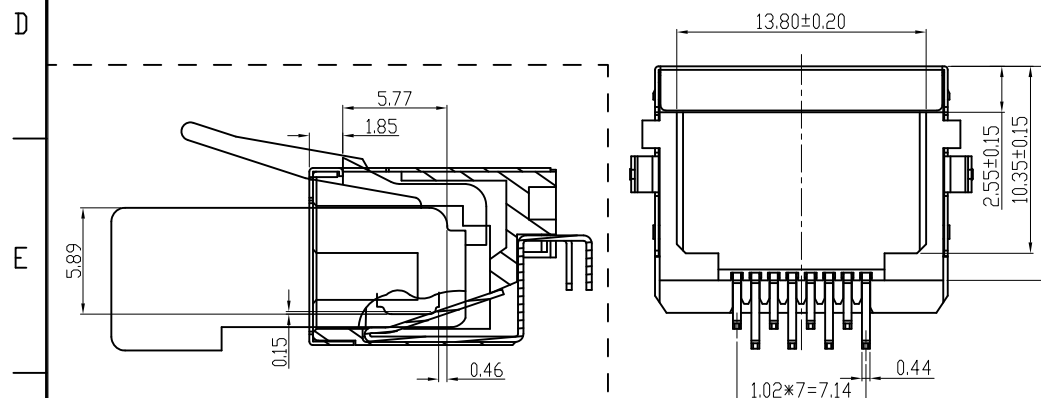
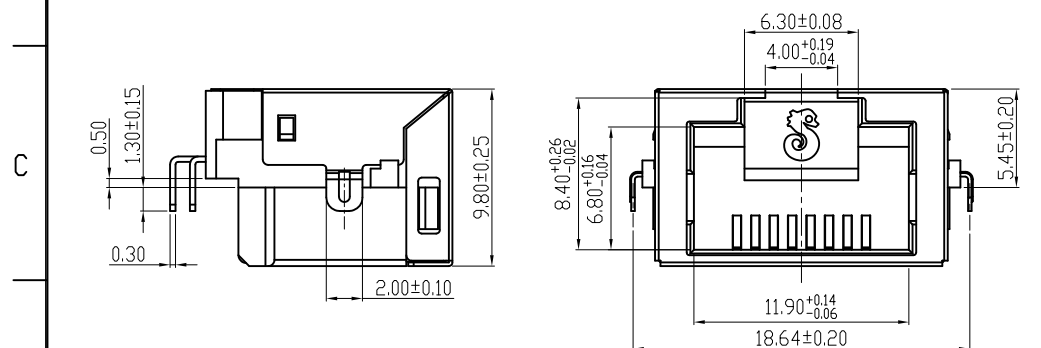


REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
Aa	新訂圖面	—	11/05/2014	胡久量
Aa	增加客戶機種料號	ECR	10/12/2015	胡久量

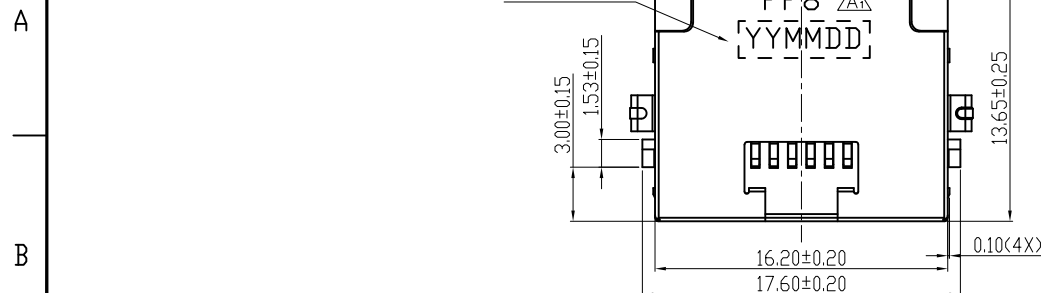

MATE RJ45 PLUG

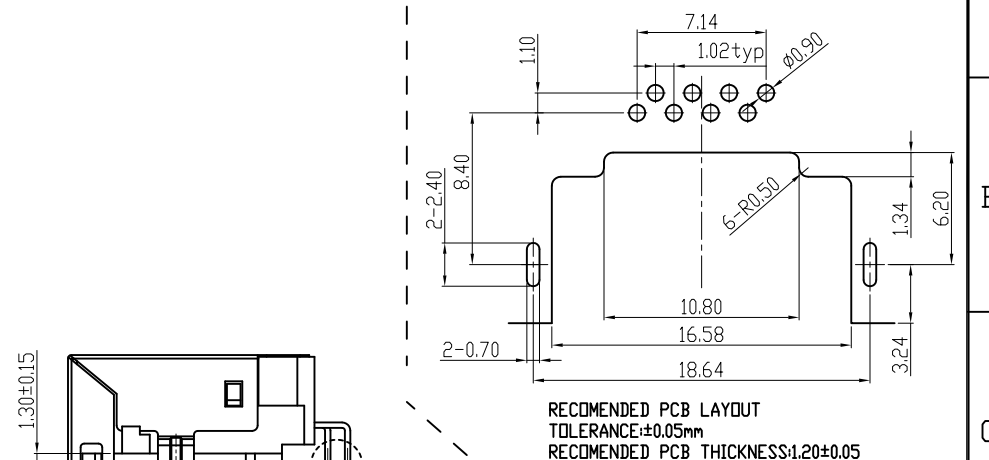

- NOTES:
- MATERIAL:
 - 1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0, COLOR:BLACK
 - 1-2:TERMINAL:PHOSPHOR BRONZE(C5210R);T=0.30mm TREATMENT:50u"G/50u"MATTE TIN UNDERPLATED:50u" NI MIN
 - 1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
 - ELECTRICAL CHARACTERISTICS:
 - 2-1.CURRENT RATING:1.5A MAX.
 - 2-2.VOLTAGE RATING:150V MAX.
 - 2-3.INSULATION RESISTANCE:1000MΩ MIN AT 500V DC AFTER 1 MINUTE.
 - 2-4.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC CONTACT TO CONTACT.
 - MECHANICAL CHARACTERISTICS:
 - 3-1.MATING FORCE:2.3kgf MAX.
 - 3-2.UNMATING FORCES:5.0kgf MIN
 - 3-3.OPERATING TEMPERATURE:-10°TO +80°

Part Number(客戶)	AU
2RJ1730-000111F	5u"

TABLE:


1u"	CD4531032012	WHITE NI	
5u"	CD4531032012	WHITE NI	YES
AU PLATING	PART NUMBER	SHELL PLATING	HF


東莞世華電子有限公司
 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
 地址:東莞市塘廈鎮諸佛嶺178工業區
 TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY 胡久量
 CHECKED BY
 APPROVED BY
 ITEM
 PART NO

MINI RJ45 PHONE JACK無LED
 (板上5.45mm 四)

CD4531032012

ANGLE PROJECTION

 UNIT mm
 SCALE 1:1
 TOLERANCE .X±0.20 .XX±0.10
 DATE 10/12/2015