
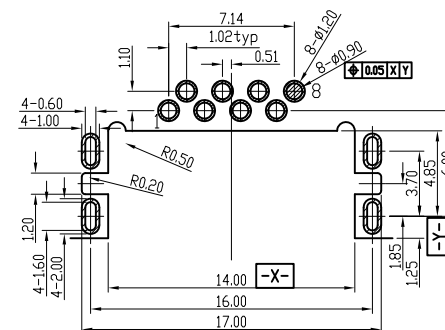
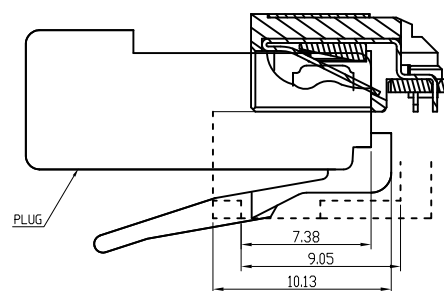
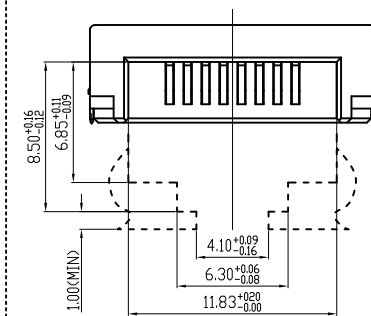





RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A0	新訂圖面	—	11/27/2017	鍾 杭
A1	修改字碼位置及大小	ECR	04/09/2019	左勝勝


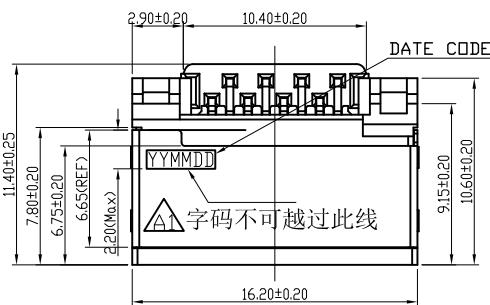


RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMMENDED PCB THICKNESS:1.00±0.05

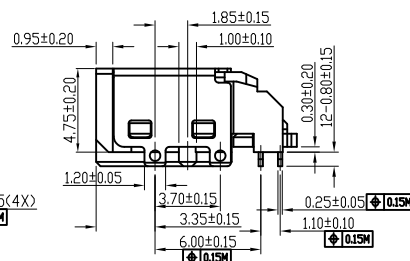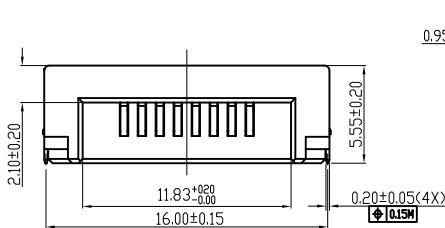

NOTES:

- MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH)/PA4T;UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 50u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 50u" MIN.
- SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:STOPPLE:LCP(E130i);UL 94V-0,COLOR:BLACK
1-5:DEFEND:LCP(E130i);UL 94V-0,COLOR:BLACK
- SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.CONTACT RESISTANCE:45 MILLIOHMS INITIAL.
2-3.INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

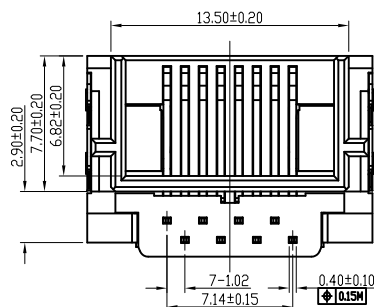

Part Number(客戶)	AU
2RJ1790-000111F	G/F
2RJ1790-000211F	30u"

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	左勝勝	ITEM	
CHECKED BY			
APPROVED BY		PART NO	

半截式RJ45 PHONE JACK(H=4.75mm)

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
TOLERANCE	DATE	04/09/2019
.X±0.20 .XX±0.10		