

RoHS
Compliant

Halogen Free

REV

DESCRIPTION

ECN/ECR

DATE

DRAWN BY




新訂圖面


—

06/07/2018

鍾 杭

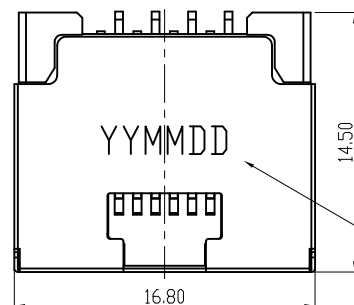





DATE CODE

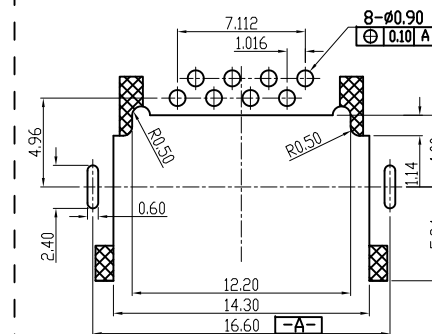


RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05mm

RECOMMENDED PCB THICKNESS:1.20±0.05

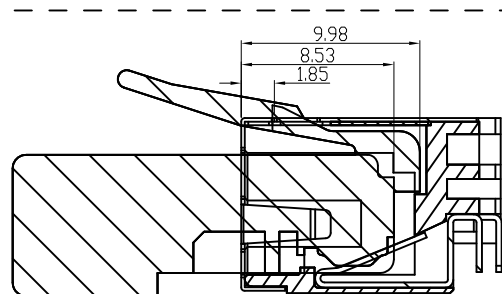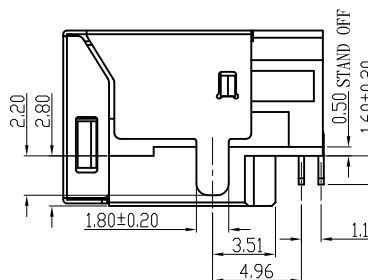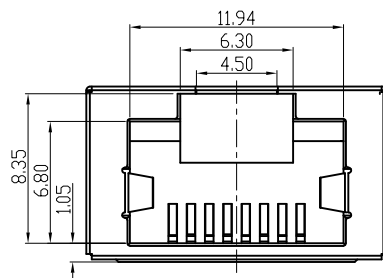

MATE RJ45 PLUG

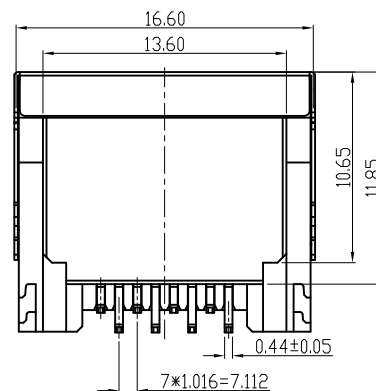

NOTES:

1.MATERIAL:

1-1:HOUSING:PA10T+30%GF;UL 94V-0,
COLOR:BLACK

1-2:TERMINAL:PHOSPHOR BRONZE(C5210R);T=0.30±0.05mm
TREATMENT:1u" Au/50u" MATTE TIN

1-3:SHELL:SUS(201);T=0.20±0.05mm,TREATMENT:50u" NICKEL

2.ELECTRICAL CHARACTERISTICS:

2-1.VOLTAGE RATING:150VAC MAX.

2-2.CURRENT RATING:1.5AMP MAX.

2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.

2-4.DIELECTRIC WITHSTANDING VOLTAGE:

1000V AC 60HZ 1MINUTE.

2-5.DURABILITY:5000 CYCLES.

2-6.OPERATING TEMPERATURE:-30°C TO+70°C.

2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

2-8.MATES WITH MODULAR PLUG CONFORMING TO FCC
PART 68,SUBPART F.



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY

鍾 杭

CHECKED BY

APPROVED BY

ITEM

MINI RJ45 PHONE JACK(板上7.0mm)

(明環專用)

PART NO

CD4651072001

TOLERANCE

ANGLE PROJECTION

UNIT

mm



SCALE

1:1

DATE

06/07/2018