
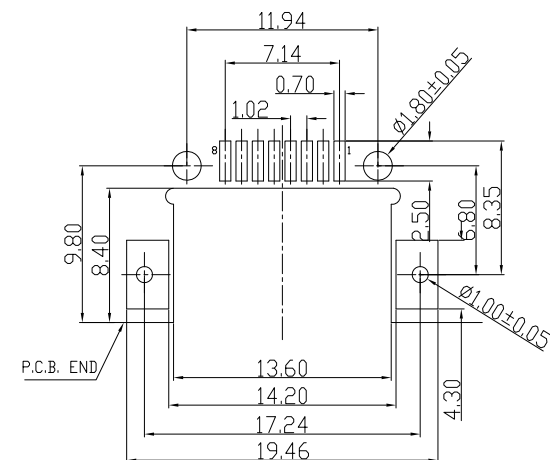
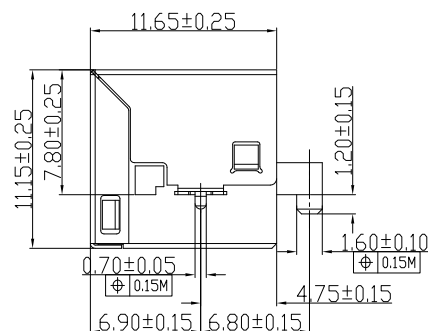
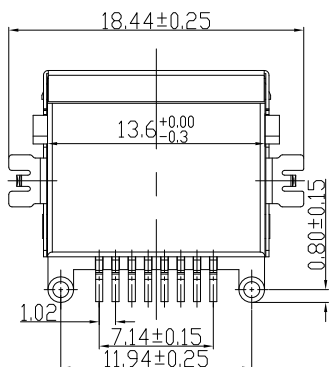
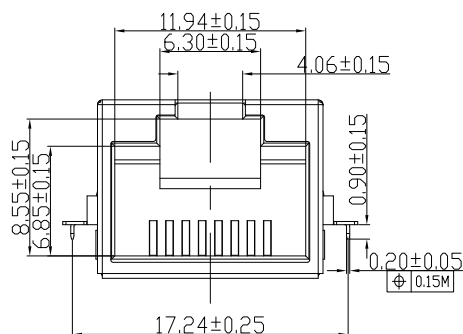


RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
	新訂圖面	—	01/29/2018	左勝勝

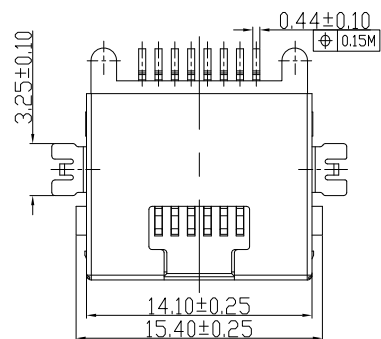

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

PCB TOLERANCES ±0.05

NOTES:

1.MATERIAL:

1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0,
COLOR:BLACK

1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:

1.GOLD FLASH MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.

1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI MIN

2.SPECIFICATIONS:

2-1.VOLTAGE RATING:150VAC MAX.

2-2.CURRENT RATING:1.5AMP MAX.

2-3.INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.

2-4.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC 60HZ 1MINUTE.

2-5.DURABILITY:5000 CYCLES.

2-6.OPERATING TEMPERATURE:-30°C TO+70°C.

2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

Part Number(信音)	AU
2RJ1794-000111F	G/F




東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	左勝勝	ITEM	RJ45 PHONE JACK(板上7.8mm)SMT
CHECKED BY		PART NO	CD4531072005
APPROVED BY			

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
TOLERANCE	DATE	

.X±0.20
.XX±0.10