
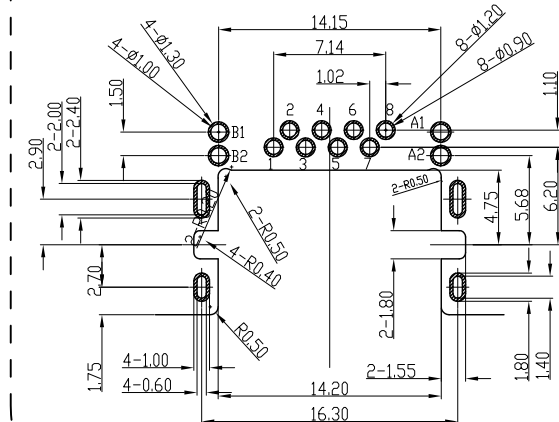
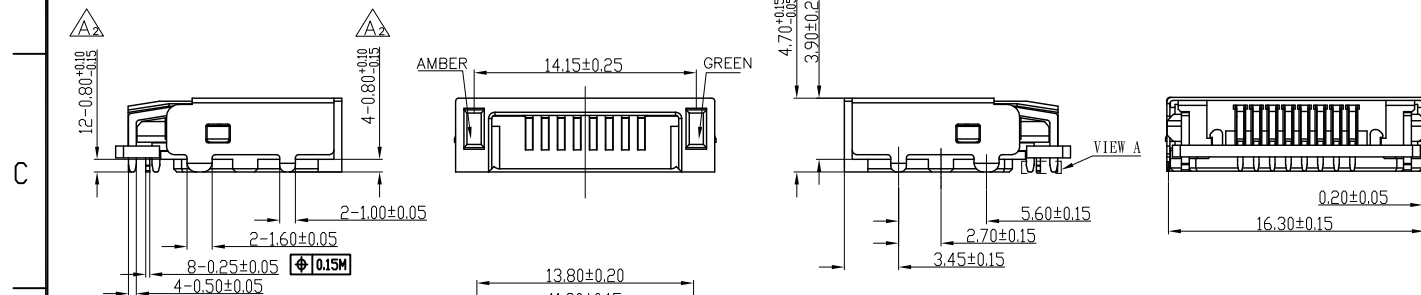


RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A	新订图面	—	03/08/2018	鍾 杭
A	修正放大视图标注尺寸	ECR	07/16/2018	左勝勝
A	修改结构	ECR	10/29/2018	左勝勝
A	修改字码位置及大小	ECR	4/9/2019	左勝勝

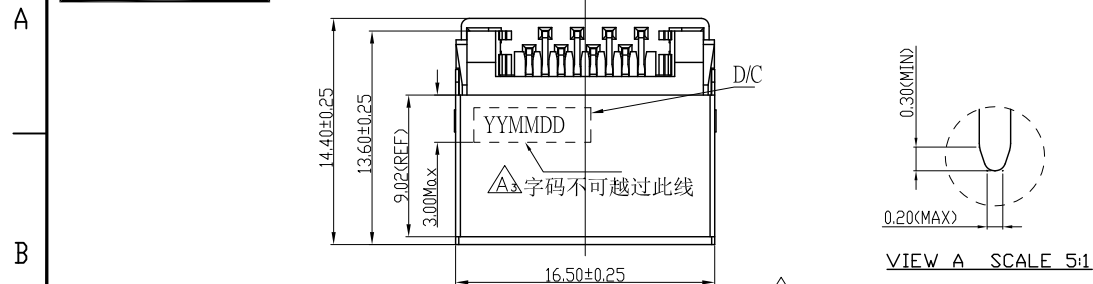

RECOMMENDED PCB LAYOUT TOLERANCE:±0.05mm
RECOMMENDED PCB THICKNESS:1.0mm(TOP VIEW)

NOTES:
1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0;
COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI MIN
1-4:LED:AMBER/GREEN,TREATMENT:TIN
1-5:DEFEND:PC(E6808);UL 94V-0,
COLOR:BLACK
1-6:CAP:PC(E6808);UL 94V-0,
COLOR:BLACK
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

Part Number(客户)	AU
2RJ3Y35-108111F	30u"
2RJ3Y35-108211F	G/F

LED ELECTRICAL CHARACTERISTIC

MODE	COLOR		WAVELENGTH	FORWARD CURRENT
A1(+) A2(-)	GREEN	A1  A2	564-577nm	If=20mA
B1(+) B2(-)	AMBER	B1  B2	585-597nm	If=20mA



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY

左勝勝

CHECKED BY

APPROVED BY

ITEM

半截式 RJ45 PHONE JACK(板上3.90mm)

PART NO

CD4531072006-XX

ANGLE PROJECTION



UNIT

mm

SCALE

1:1

TOLERANCE

.X±0.20
.XX±0.10

DATE

4/9/2019