

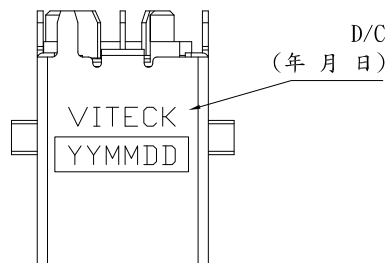

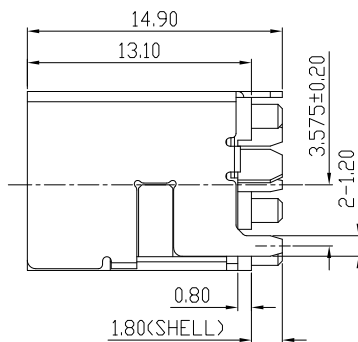


RoHS
Compliant

Halogen Free




D/C
(年 月 日)


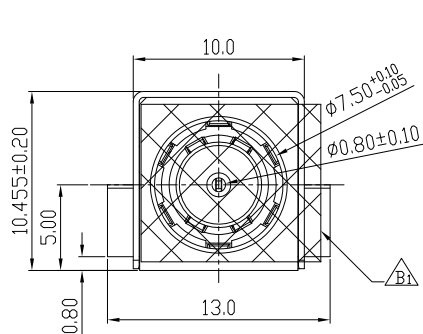


SCHEMATIC	
	SPRING (+) #1
	SIGNAL #3
	SPRING (-) #2

TABLE:	
Part Number(汎準)	AU
DCJ-034-1N03HG	G/F
DCJ-034-1N03HP	30u" Pd/Ni 5u" Au
DCJ-034-1N03HI	5u"

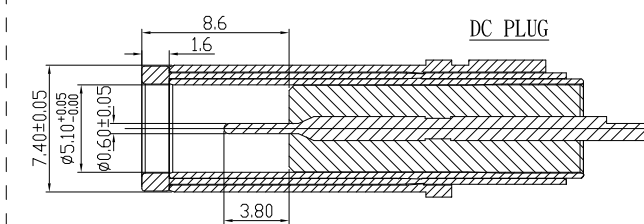

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
	新訂圖面	—	02/14/2017	胡久量
	工程變更,變更外殼,內,外彈片材料規格及參拉片規格,增加電鍍規格	ECN	04/03/2018	鐘 杭
	修改參拉片粘貼位置	ECR	12/06/2018	鐘 杭

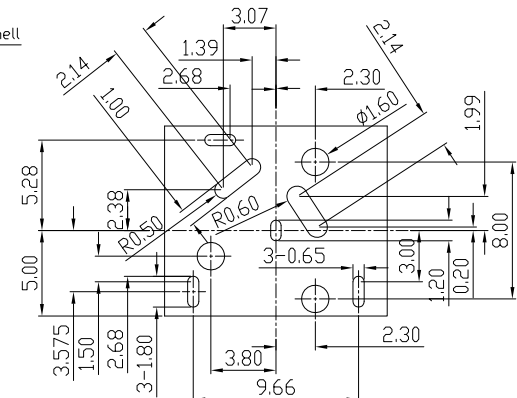

NOTES:
1.MATERIAL:
1-1:HOUSING:LCP(E130I);UL 94V-0,COLOR:BLACK
COLOR:BLACK
1-2:COVER:LCP(E130I);UL 94V-0,COLOR:BLACK
COLOR:BLACK
 1-3:GROUND PIN:
TREATMENT:PHOSPHOR BRONZE;T=0.30mm;SEE TABLE
 1-4:POWER PIN:PHOSPHOR BRONZE;T=0.30mm
TREATMENT;SEE TABLE
1-5:DETECT PIN:PHOSPHOR BRONZE;T=0.30mm
TREATMENT;SEE TABLE
 1-6:SHELL:SUS;T=0.35mm,TREATMENT:50u" NI
1-7:MYLAR:THERMOPLASTIC;COLOR:YELLOW
SPECIFICATION:
2. ELECTRICAL CHARACTERISTICS:
2.1 RATED :20V 7A
2.2 INSULATION RESISTANCE 100MOHMS MIN AT500V DC AFTER 1 MINUTE
2.3 DIELECTRIC WITHSTANDING VOLTAGE: 150V AC FOR 1 MINUTE,
2.4 CONTACT RESISTANCE:30 mOHMS MAX.
3. MECHANICAL CHARACTERISTICS:
3.1 INSERTION FORCE:3.0 KgF MAX
EXTRACTION FORCE:0.35 KgF Min
3.2 DURABILITY(INSERTION/EXTRACTION CYCLES):5000 CYCLES
4. PART NUMBER:
DCJ-034-1N03HX
PLATE ON CONTACT AREA:
 G: GOLD FLASH
P: 30u"Pd/Ni WITH 5u"Au
1: Au 5u"MIN. ON CONTACT AREA.
50u"Ni MIN. UNDERPLATING

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY	鐘 杭	ITEM	DC JACK (立式) H=13.1mm	ANGLE PROJECTION	UNIT	mm
CHECKED BY					SCALE	1:1
APPROVED BY		PART NO	CD4521062003-XX	TOLERANCE	DATE	12/06/2018