
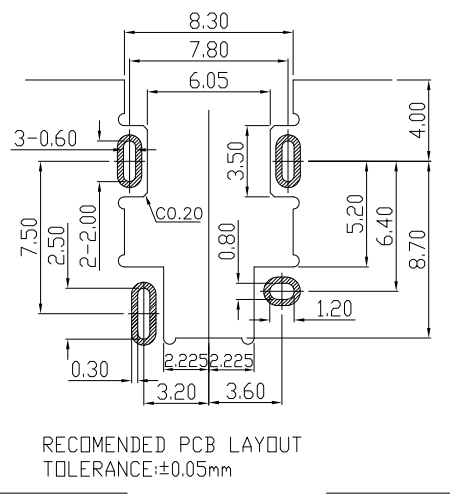

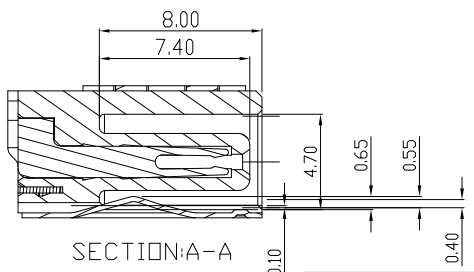
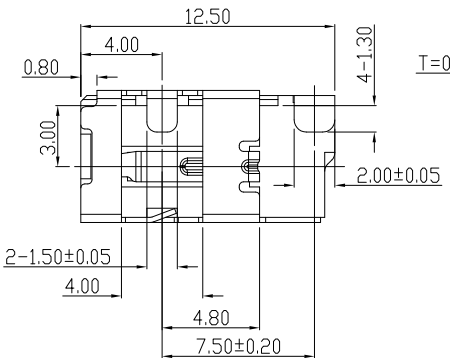
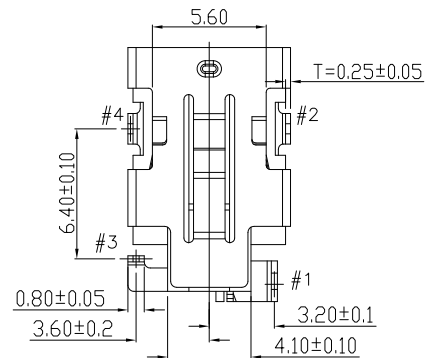



REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A0	新訂圖面	—	10/25/2017	唐忠洪
A1	新增電鍍規格G/F 5u" 30u"及TABLE表	ECR	07/27/2018	左勝勝

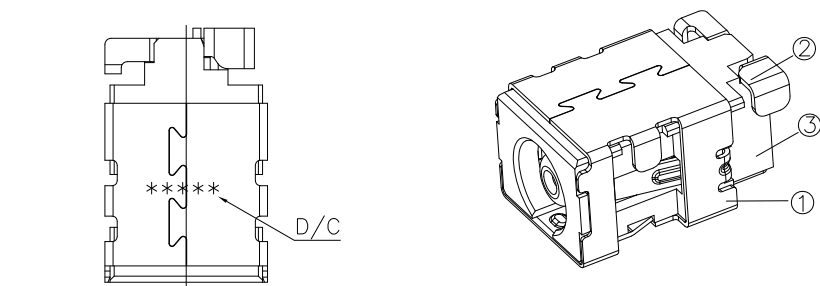

- SPECIFICATIONS:
- ELECTRICAL SPEC:
 - 1-1.RATED CURRENT:11.5A
 - 1-2.RATED VOLTAGE:20V
 - 1-3.INSULATION RESISTANCE:100MΩ MIN.AFTER BY 500V DC FOR 1MINUTE
 - 1-4.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1MINUTE
 - 1-5.CONTACT RESISTANCE:30mΩ MAX(INITIAL)
 - MECHANICAL SPEC:
 - 2-1.INSERTION FORCE:3.0Kgf MAX
 - 2-2.WITHDRAWAL FORCE:
 - INITIAL:0.70 Kg MIN
 - AFTER LIFE TEST:0.50 Kg MIN
 - WEIGHT:1.0 GRAM
 - TEMPERATURE RISE CAN'T EXCEED 30°C MAX
 - LIFE TEST(INSERTION/WITHDRAWAL):5000 CYCLES MIN
 - LOW HALOGEN SPEC:
 - 6.1 Br < 900 ppm
 - 6.2 Cl < 900 ppm
 - 6.3 Br+Cl < 1500 ppm
 - PART LEGEND: DCJ-043-1N03HG

SCHEMATIC		
	POWER PIN #1(+)	
	DETECT PIN #3	
	GROUND PIN #2#4(-)	
XX	Part Number(凡準)	AU
01	DCJ-043-1N03HG	30u"
02	DCJ-043-1N03HP	30u" Pd/Ni 5u"Au
03	DCJ-043-1N03HI	5u"
04	DCJ-043-1N03HG	G/F

Build of material:

NO	DESCRIPTION	QTY	MATERIAL	FINISH(COLOR)
4	HP SLIM DC IN JACK OFFSE-DETECT PIN	1	PHOSPHOR BRONZE(C5210R) T=0.30±0.05mm	SEE TABLE ON CONTACT AREA. WATTE SN 80% MIN ON SOLDER TAIL. ALL OVER NT 50u" MIN.
3	HP SLIM DC IN JACK OFFSE-POWER PIN	1	COPPER ALLOY(C7035); T=0.30±0.03mm	SEE TABLE ON CONTACT AREA. WATTE SN 80% MIN ON SOLDER TAIL. ALL OVER NT 50u" MIN.
2	HP SLIM DC IN JACK OFFSE-HOUSING	1	PHAT (DSM)	BLACK
1	HP SLIM DC IN JACK OFFSE-SHELL	1	COPPER ALLOY(C7035); T=0.25±0.03mm	SEE TABLE ON CONTACT AREA. WATTE SN 80% MIN ON SOLDER TAIL. ALL OVER NT 50u" MIN.



東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 左勝勝
CHECKED BY
APPROVED BY

ITEM DC JACK 沉板式 8.0*6.5 (CH=3.00)
PART NO CD4521062014-XX TOLERANCE

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
.X±0.30 .XX±0.20	DATE	