

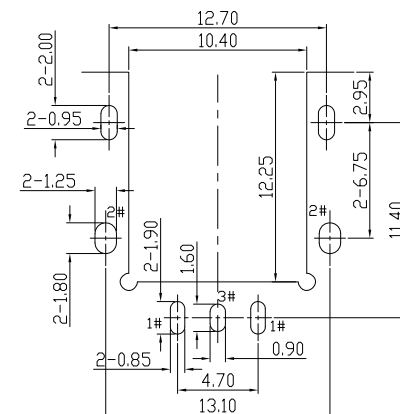
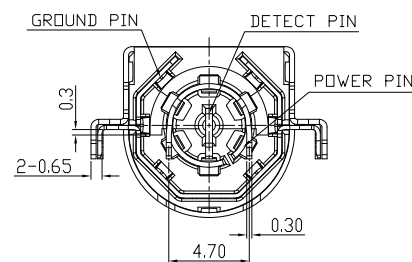
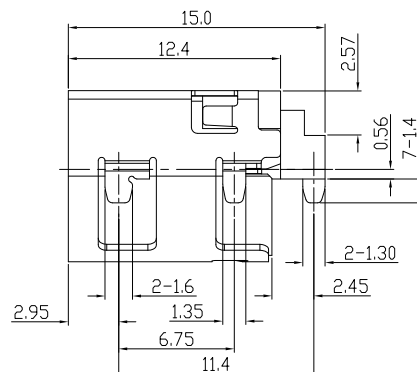



Halogen Free

Technical drawing of a shell and tube heat exchanger. The drawing shows a cross-section of the shell and internal tubes. A label 'SHELL' points to the outer casing. The drawing is a technical line drawing showing the internal structure of a shell and tube heat exchanger. It features a central vertical tube bundle surrounded by a shell. The tubes are connected to a header at the top. The shell has a flange at the top and bottom. The drawing is a technical line drawing showing the internal structure of a shell and tube heat exchanger. It features a central vertical tube bundle surrounded by a shell. The tubes are connected to a header at the top. The shell has a flange at the top and bottom. The drawing is a technical line drawing showing the internal structure of a shell and tube heat exchanger. It features a central vertical tube bundle surrounded by a shell. The tubes are connected to a header at the top. The shell has a flange at the top and bottom.




RECOMENDED PCB LAYOUT
TOLERANCE:±0.05mm

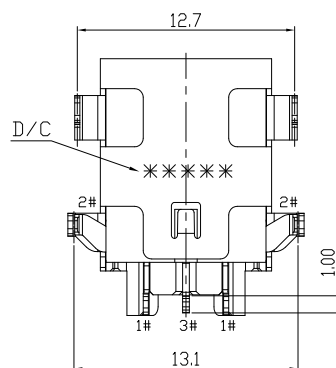

1.HOUSING:LCP (E6808);UL 94V-0,COLOR:BLACK
GROUND PIN:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
SHELL:SUS(201);T=0.30mm,
POWER PIN:PHOSPHOR BRONZE(C5210R-EH);T=0.30mm
DETECT PIN:PHOSPHOR BRONZE(C5210R-EH);T=0.40mm

B: 30u" Pd/Ni MIN WITH 5u"Au ON CONTACT AREA,
MATTE SN 80u" MIN ON SOLDER TAIL,
ALL OVER NI 30u" MIN.

8.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
9.CONTACT RESISTANCE :30mΩHMS MAX
10.DURABILITY:5000 CYCLES

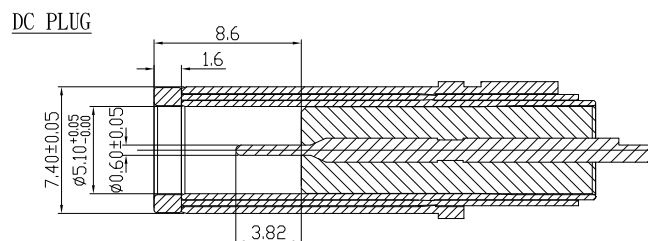

 **東莞世華電子有限公司**
SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)
地址：東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-7910020-1 FAX: 0769-7910210

APPROVED BY _____

PART NO

CD4521042004

TOLERANCE

mm



.X±0.30
.XX±0.20

DATE _____

05/26/2015