

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A

B

C










D

E







F

2: UM0071000

3: UM0072000

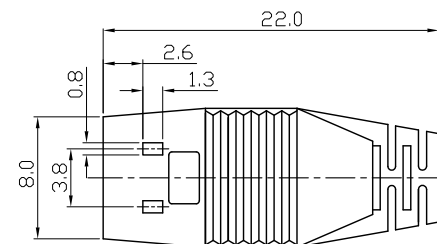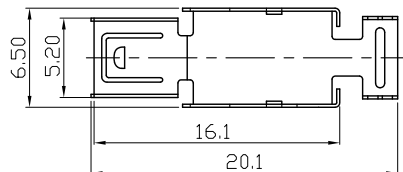

4: UM0012000

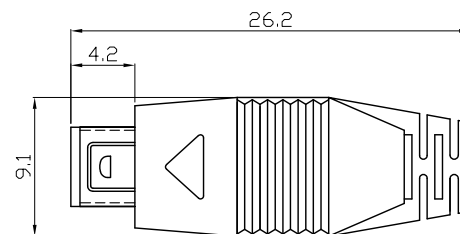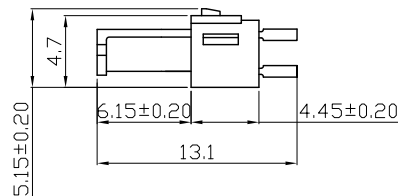

1: UM03X0AXX

UM01X0CXX

項次	名稱	料號	材質	電鍍或顏色	數量	備註
1	單件式	(0.8)4P MINI 公頭-PIN1	UM00310XX	磷銅,T=0.25±0.03MM	SEE TABLE1	2
		(0.8)4P MINI 公頭-PIN2	UM00320XX	磷銅,T=0.25±0.03MM	SEE TABLE1	2
		(0.8)4P MINI 公頭-膠心(A)	UM0011C00	NYLON 66,UL 94 V-0	SEE TABLE2	1
2	(0.8)4P MINI 公頭-上護蓋	UM0071000	不銹鋼(301) T=0.20±0.03MM	NONE	1	
3	(0.8)4P MINI 公頭-下護蓋	UM0072000	不銹鋼(301) T=0.20±0.03MM	NONE	1	
4	(0.8)4P MINI 公頭-外膠殼	UM0012000	NYLON 66,UL 94 V-0	SEE TABLE2	1	

ELECTRICAL CHARACTERISTICS:
RATINGS:DC 30V MAX or AC 40V MAX,3A
INSULATION RESISTANCE:
1000MΩ MIN
CONTACT RESISTANCE:30mΩ MAX
DIELECTRIC STRENGTH:
250V AC/1 MINUTE
INSERTION FORCE:3.57kgf MAX.
WITHDRAWAL FORCE:0.30-1.02kgf.

TABLE2:

X	COLOR
0	白
1	黑
2	米
3	藍
4	透明
5	貝吉
6	米貝吉
7	白色+噴漆
8	銀灰色+噴漆

TABLE1:

XX	PLATING
11	G.F./TIN PLATED
12	3u"G./TIN PLATED
13	5u"G./TIN PLATED
14	10u"G./TIN PLATED
15	15u"G./TIN PLATED
16	20u"G./TIN PLATED
17	30u"G./TIN PLATED
18	50u"G./TIN PLATED
20	30u"G./G.F. PLATED


東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY **丁麗**
CHECKED BY
APPROVED BY

ITEM **<0.8>4P MINI 公頭-A**
(四件式)
PART NO **UM01X0CXX**

ANGLE PROJECTION
UNIT
MM
SCALE
DATE
11/01/2003
REVISION
DESCRIPTION
DATE

1 2 3 4 5 6 7 8