
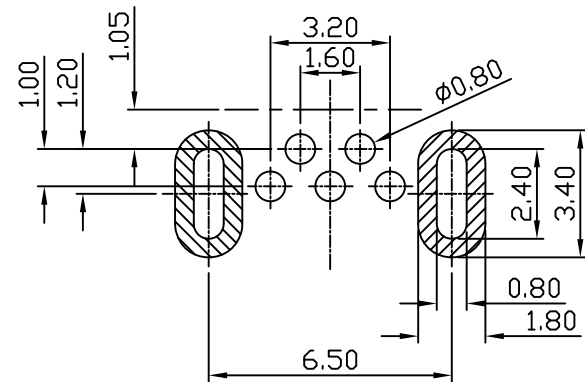



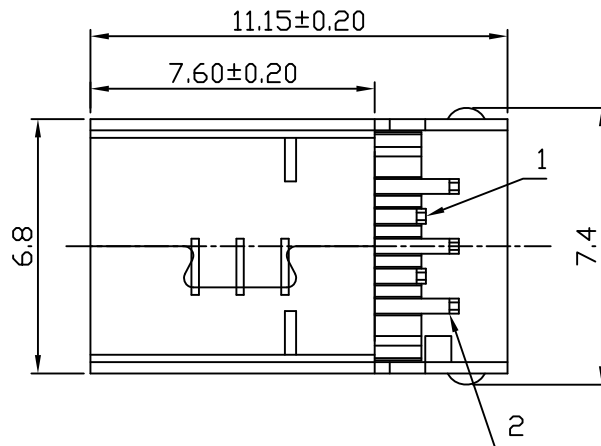

HOLE LAYOUT (TOP VIEW)

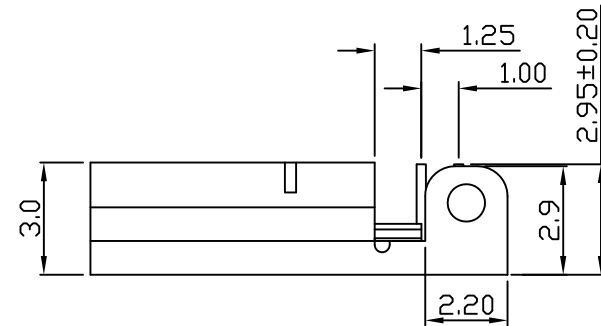


TABLE 2:

Y	COLOR
0	白
1	黑
2	米

TABLE 1:

XX	PLATING
11	G.F./TIN PLATED
12	3U"G./TIN PLATED
13	5U"G./TIN PLATED
14	10U"G./TIN PLATED
15	15U"G./TIN PLATED
16	20U"G./TIN PLATED
17	30U"G./TIN PLATED
18	50U"G./TIN PLATED

Build of material:

項次	名 稱	料 號	材 質	電鍍或顏色	數量	備 註
1	5P MINI USB-B公頭-PINA(DIP)	UN0032AXX	PHOSPHOR BRONZE(EH)T=0.25±0.03mm	SEE TABLE 1	2	
2	5P MINI USB-B公頭-PINB(DIP)	UN0032BXX	PHOSPHOR BRONZE(EH)T=0.25±0.03mm	SEE TABLE 1	3	
3	5P MINI USB-B公頭-膠心(PIN組裝式)	UN0030Y00	PA9T UL 94 V-0	SEE TABLE 2	1	
4	5P MINI USB-B 公頭-外殼(DIP)	UN0073A01	SPCC, T=0.30±0.03mm	吃錫鍍	1	

ELECTRICAL CHARACTERISTICS:
 RATINGS:DC 30V MAX or AC 40V MAX,3A
 INSULATION RESISTANCE:
 100MΩ MIN
 CONTACT RESISTANCE:50mΩ MAX
 DIELECTRIC STRENGTH:
 250V AC/1 MINUTE
 INSERTION FORCE:3.57kgf MAX.
 WITHDRAWAL FORCE:0.30~1.02kgf.

 東莞世華電子有限公司 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN) 地址:東莞市塘廈鎮諸佛嶺178工業區 TEL:0769-7910020-1 FAX:0769-7910210	DRAWN BY	張敏華	ITEM	5P MINI USB-B 公頭(DIP)		ANGLE PROJECTION	UNIT	mm	 SCALE 8:1 DATE 11/07/2006 REVISION	材料變更 DESCRIPTION DATE	11/07/2006
	CHECKED BY					 X±0.2 XX±0.10	SCALE	8:1			
	APPROVED BY			PART NO	UN02Y0JXX	TOLERANCE	DATE	11/07/2006			