

12345678

A

B

C

D

A



B

C





D

E



F

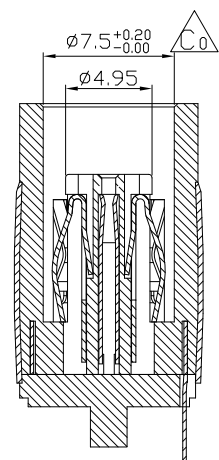

SECTION A-A

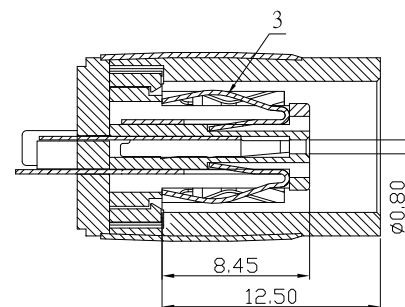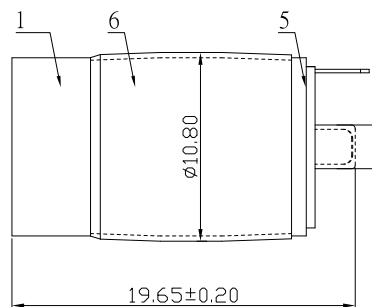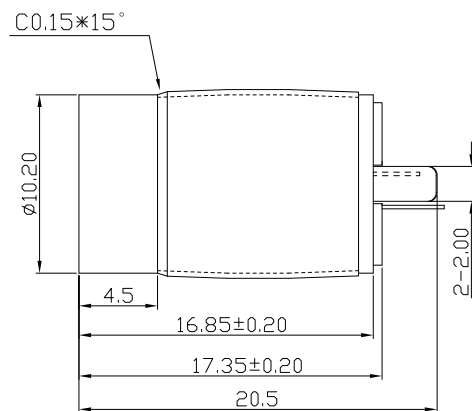

SECTION C-C 旋轉90°

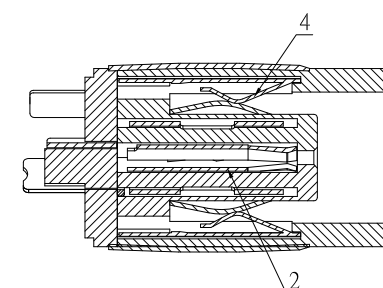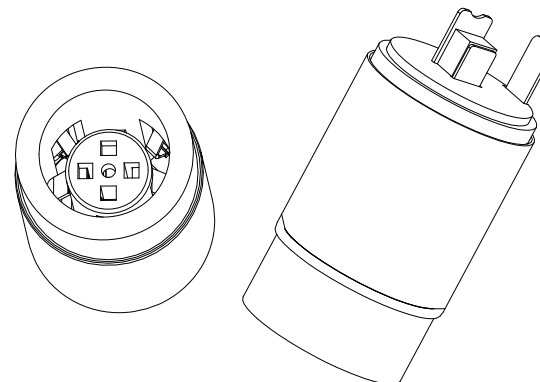

SECTION B-B 旋轉45°

Build of material:

6	DC JACK 線端-銅管	1	CD005952001-7	BRASS	素材	車件
5	DC JACK 線端-后塞	1	CD005952001-5	PBT+15%GF, UL 94 V-0	BLACK	成型件
4	DC JACK 線端-外彈片	1	CD005952001-4	PHOSPHOR BRONZE(C5210R-H) T=0.20±0.02mm	吃錫鍍	衝壓件
3	DC JACK 線端-內彈片	1	CD005952001-3	PHOSPHOR BRONZE(C5210R-H) T=0.25±0.02mm	吃錫鍍	衝壓件
2	DC JACK 線端-母端子	1	CD005952001-2	PHOSPHOR BRONZE(C5210R-H) T=0.20±0.02mm	吃錫鍍	衝壓件
1	DC JACK 線端-膠心	1	CD005952001-1	PA46, UL 94 V-0	BLACK	成型件
項次	名稱	數量	料號	材質	電鍍(或顏色)	備註

SPECIFICATIONS:

1.ELECTRICAL:

VOLTAGE RATING: 19V ;
CURRENT RATING: POWER PIN 6A ,ID PIN:1A;
INSULATION RESISTANCE: 100MΩ Min;
CONTACT RESISTANCE: 30mΩ Max;
AFTER5000 CYCLES:50m OHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE:500V AC/1 minute;

2.MECHANICAL:

INSERTION FORCE: 1.5Kgf Max;
WITHDRAWAL FORCE: 0.35Kgf Min;

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -40°C TO +85°C;



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY

陳長江

CHECKED BY

APPROVED BY

ITEM


DC JACK 線端

PART NO

CD005952001

TOLERANCE

ANGLE PROJECTION



UNIT

mm

SCALE

4: 1

DATE

09/31/2009

REVISION

DESCRIPTION

DATE

工程變更修訂圖面尺寸公差

09/31/2009

09/31/2009

09/31/2009

12345678