


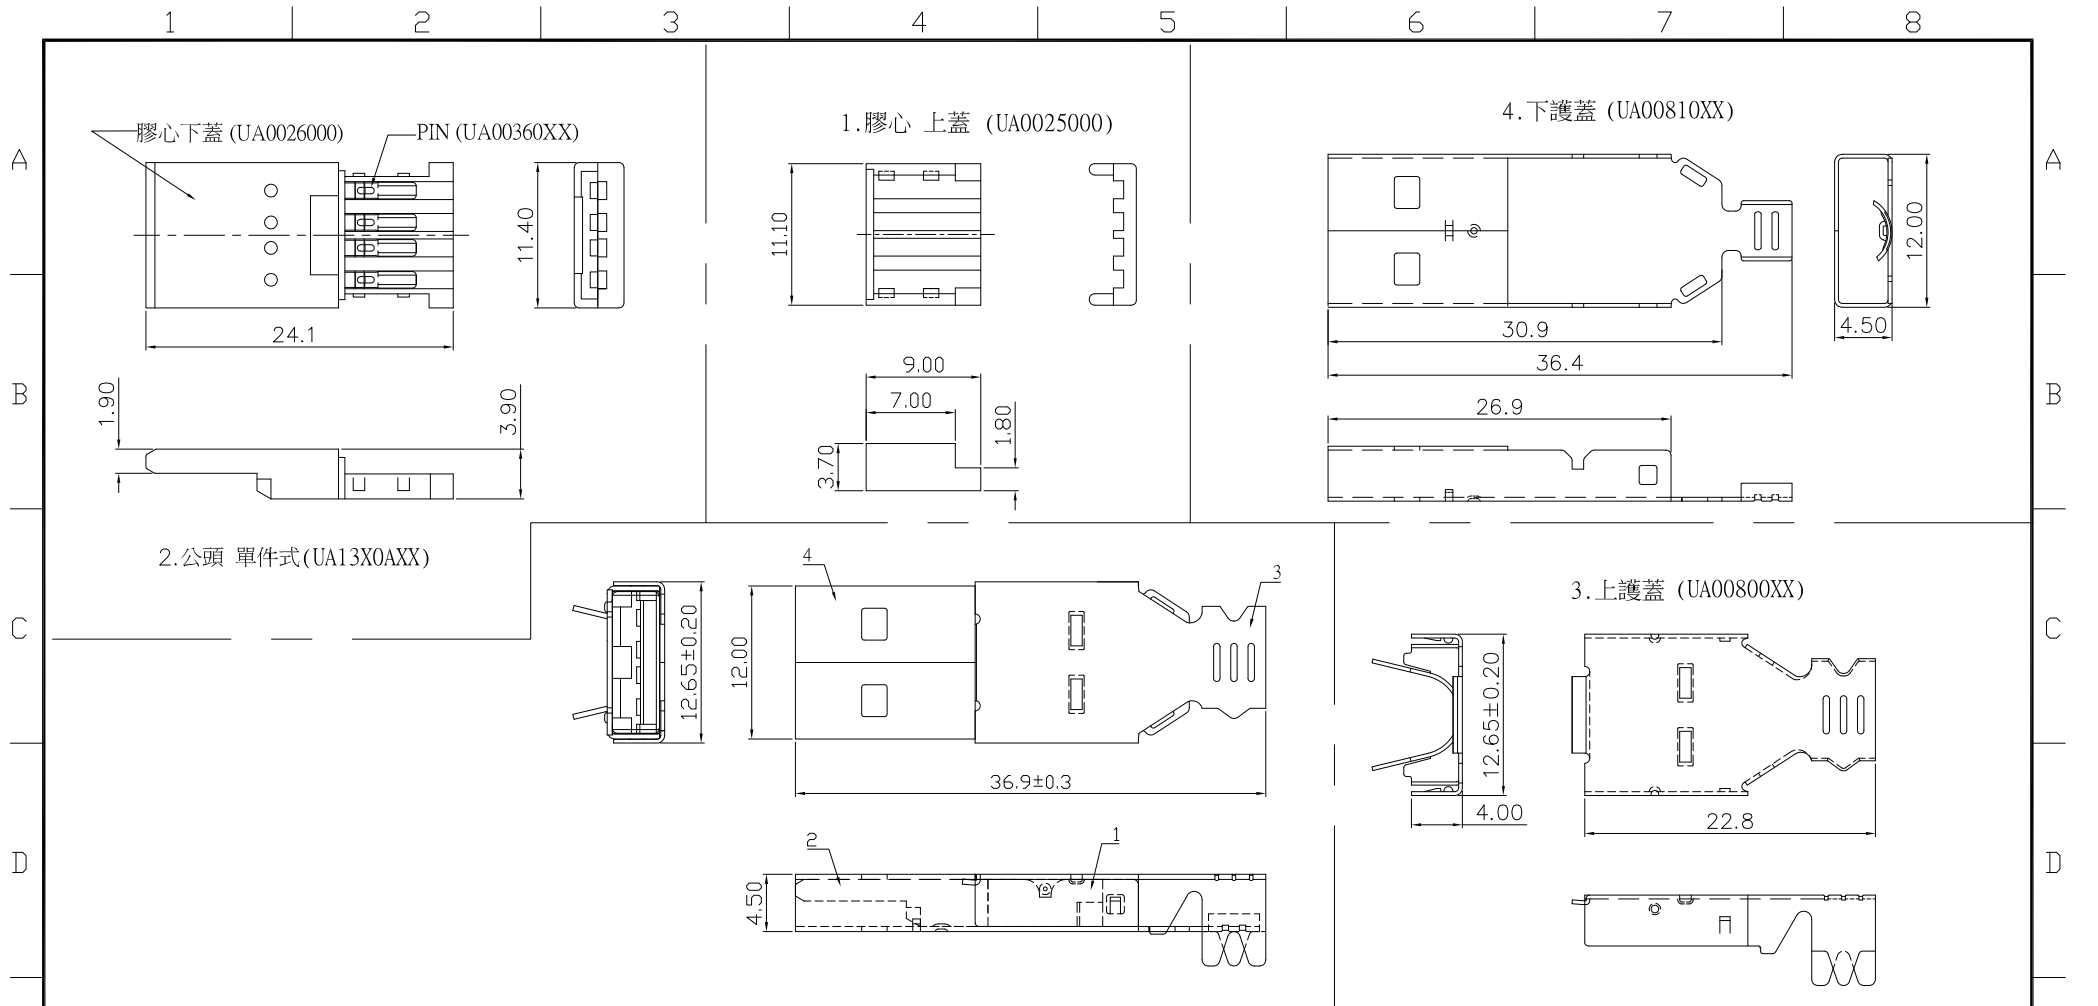

項目	名稱	料號	材料	電鍍或顏色	數量	備註
1	膠心 上蓋	UA0025000	PBT+15%GF, UL 94 V-0	SEE TABLE2	1	
2	公頭 單件式	UA0026000	PBT+15%GF, UL 94 V-0	SEE TABLE2	1	
	PIN	UA00360XX	BRASS(H), T=0.30±0.03MM	SEE TABLE1	4	
3	上護蓋	UA00800XX	SPCC OR BRASS, T=0.30±0.03MM	SEE TABLE1	1	
4	下護蓋	UA00810XX	SPCC OR BRASS, T=0.30±0.03MM	SEE TABLE1	1	

ELECTRICAL CHARACTERISTICS:
RATINGS:30V DC/AC 1A Max.
CONTACT RESISTANCE:30mΩ Max.
INSULATION RESISTANCE:
100MΩ Min.at 500V DC.
DIELECTRIC STRENGTH:
750V AC/1 minute.
INSERTION FORCE:3.6kgf MAX
WITHDRAWAL:1.0kgf MIN

TABLE2:

X	COLOR
0	白
1	黑
2	米

TABLE1:

XX	PLATING	13	5u"G./TIN PLATED
00	NONE	14	10u"G./TIN PLATED
01	TIN PLATED.	15	15u"G./TIN PLATED
02	NICKEL PLATED.	16	20u"G./TIN PLATED
03	GOLD FLASH PLATED.	17	30u"G./TIN PLATED
11	G.F./TIN PLATED	18	50u"G./TIN PLATED
12	3u"G./TIN PLATED	20	30u"G./G.F. PLATED

 東莞世華電子有限公司 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN) 地址:東莞市塘廈鎮諸佛嶺178工業區 TEL: 0769-7910020-1 FAX: 0769-7910210	DRAWN BY	翁紅燕	ITEM	USB CONNECTOR(SERIES A)		ANGLE PROJECTION	UNIT	MM		整理尺寸標示及BOM表,舊圖作廢	07/10/2003
	CHECKED BY			-公頭 四件式(一體式)			SCALE	2:1			
	APPROVED BY			PART NO	UA12X00XX	TOLERANCE	.X±0.2 .XX±0.10	DATE	07/10/2003	REVISION	DESCRIPTION