

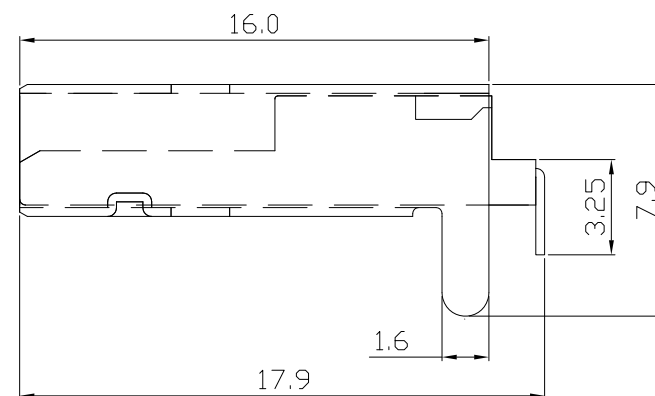
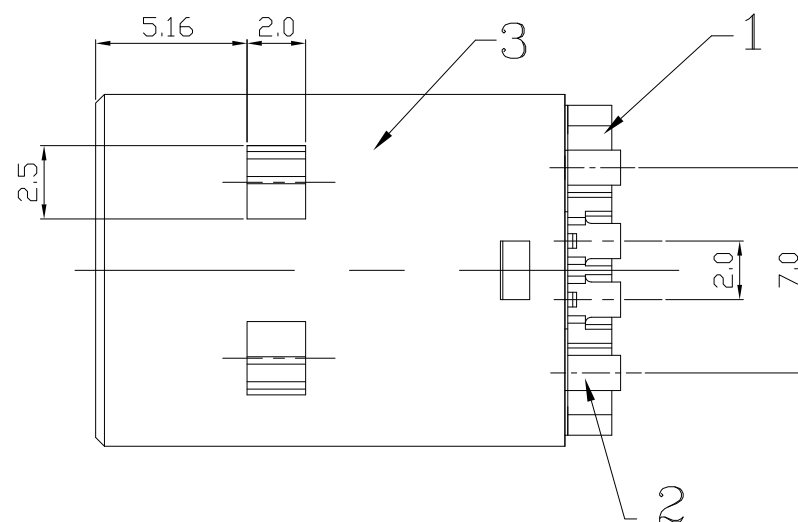
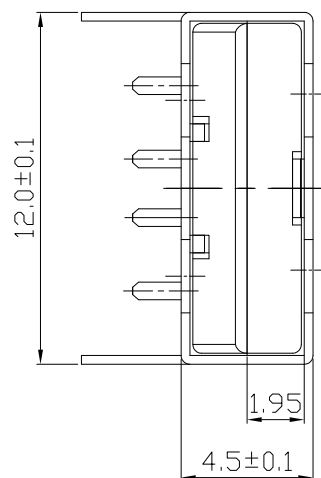
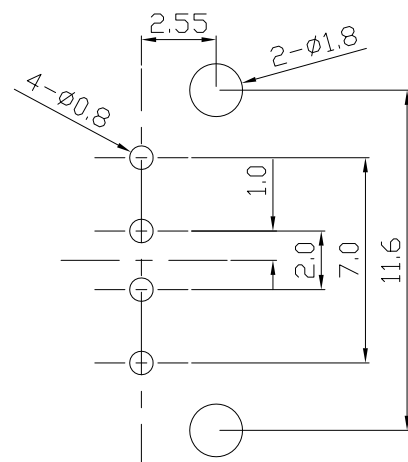


TABLE1-1

XX	PLATING	08	GOLD PLATED 20u" MIN.
00	NONE	09	GOLD PLATED 30u" MIN.
01	TIN PLATED.	10	GOLD PLATED 50u" MIN.
02	NICKEL PLATED.	11	G.F./TIN PLATED
03	GOLD FLASH PLATED.	12	3U"G/TIN PLATED
04	GOLD PLATED 3u" MIN.	13	5U"G/TIN PLATED
05	GOLD PLATED 5u" MIN.	14	10U"G/TIN PLATED
06	GOLD PLATED 10u" MIN.	15	15U"G/TIN PLATED
07	GOLD PLATED 15u" MIN.	16	20U"G/TIN PLATED

TABLE1-2

X	COLOR
0	白
1	黑
2	米
3	藍

項目	名 稱	材 料	電鍍或顏色	數量	備註
1	膠心	PBT+15%GF, UL 94 V-0	SEE TABLE1-2	1	
2	焊線端子	Phosphor Bronze,T=0.30±0.03MM	SEE TABLE1-1	4	
3	本體護蓋	SPCC,t=0.30±0.03mm BRASS,t=0.30±0.03mm	SEE TABLE1-1	1	



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY

CHECKED BY

APPROVED BY

ITEM

USB CONNECTOR(SERIES-A)

公頭(DIP有腳 90°)

PART NO

UA06X0FXX

TOLERANCE

ANGLE PROJECTION



X.XX±0.20

UNIT

SCALE

MM

4:1

DATE

08/21/2001

REVISION

DESCRIPTION

DATE