




NOTES:

1. PART NO: UB08200XX(白), UB08300XX(黑)
2.

5	塞 ?	UB0023000	1	PE	NONE	
4	本體	UB0052001(亮錫) UB0052002(?)	1	PHOSPHOR BRONZE, T=0.30±0.03MM	TIN PLATED NICKEL PLATED	
3	?線端子B	UB00350XX	2	PHOSPHOR BRONZE, T=0.25±0.03MM	SEE TABLE	
2	?線端子A	UB00340XX	2	PHOSPHOR BRONZE, T=0.25±0.03MM	SEE TABLE	
1	膠心	UB0014000(白) UB0015000(黑)	1	NYLON 46	NONE	
項次 名稱		料 號	數量	材 質	電 鍍	備 註

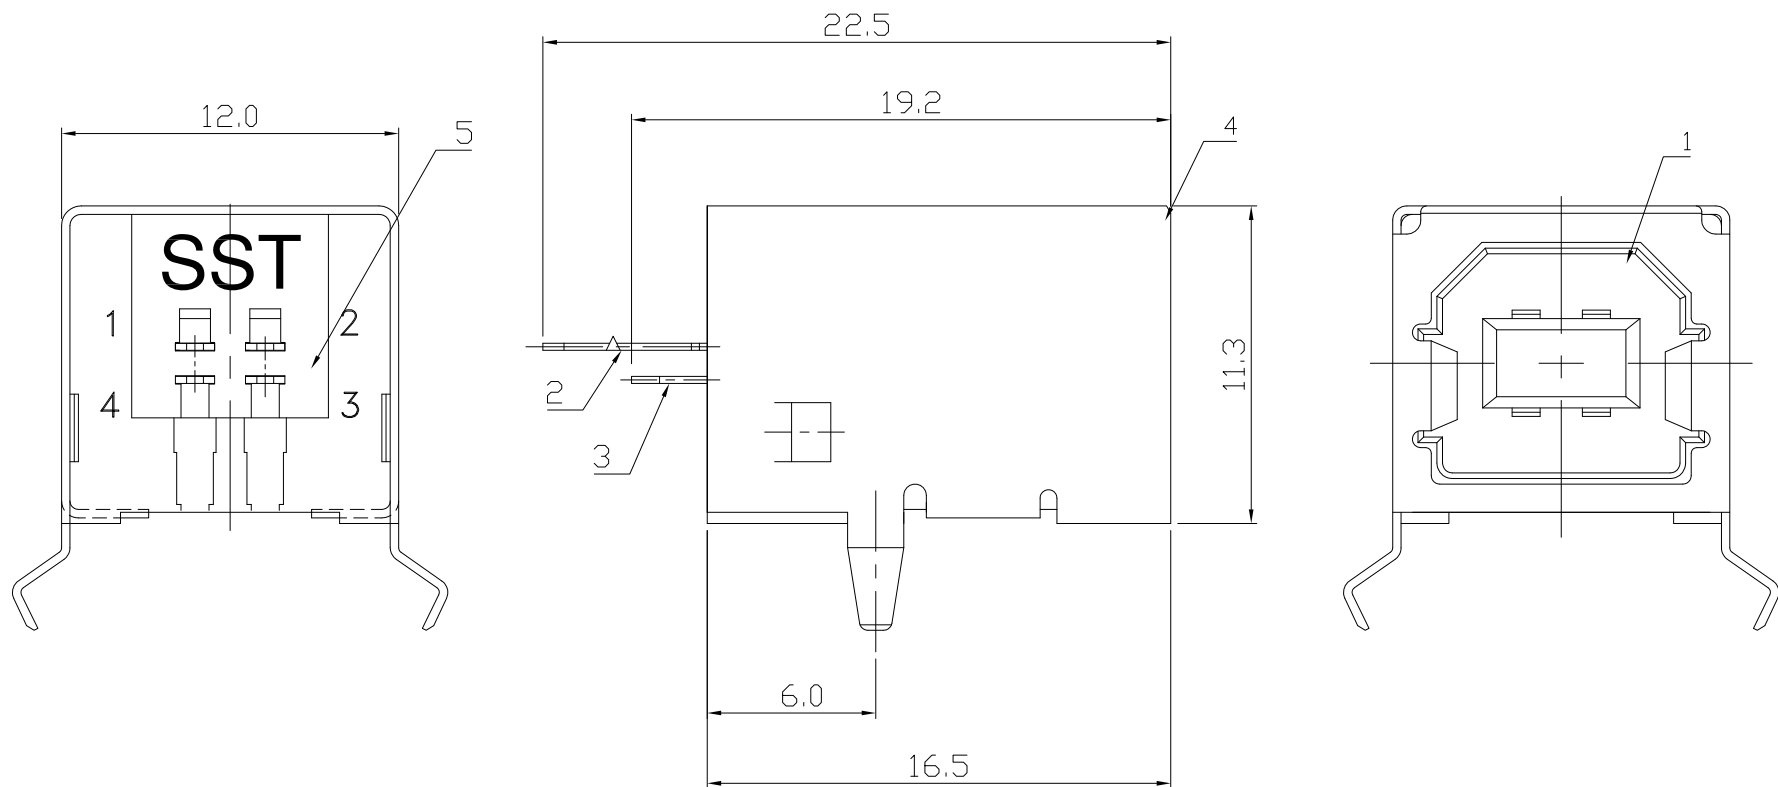

ELECTRICAL CHARACTERISTICS:
RATING: 30V DC/AC 1A Max.
CONTACT RESISTANCE: 30mΩ Max.
INSULATION RESISTANCE: 100MΩ Min at 500V DC
DIELECTRIC STRENGTH: 750V AC/1 minute.
INSERTION FORCE: 3.6kgf MAX
WITHDRAWAL FORCE: 1.0kgf MIN

TABLE:

XX	PLATING	09	GOLD PLATED 30u" MIN.
00	NONE	10	GOLD PLATED 50u" MIN.
01	TIN PLATED.	11	G.F./TIN PLATED
02	NICKEL PLATED.	12	3U"G/TIN PLATED
03	GOLD FLASH PLATED.	13	5U"G/TIN PLATED
04	GOLD PLATED 3u" MIN.	14	10U"G/TIN PLATED
05	GOLD PLATED 5u" MIN.	15	15U"G/TIN PLATED
06	GOLD PLATED 10u" MIN.	16	20U"G/TIN PLATED
07	GOLD PLATED 15u" MIN.	17	30U"G/TIN PLATED
08	GOLD PLATED 20u" MIN.	18	50U"G/TIN PLATED



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY

豆秀品

CHECKED BY

APPROVED BY

ITEM

USB CONNECTOR(SERIES B)


-母座 焊線式 180°

PART NO

UB08200XX

TOLERANCE

ANGLE PROJECTION



.X±0.2
.XX±0.10

UNIT

SCALE

DATE

MM

4: 1

02/28/2004

REVISION

DESCRIPTION

DATE



增加測試要求.

02/28/2004