


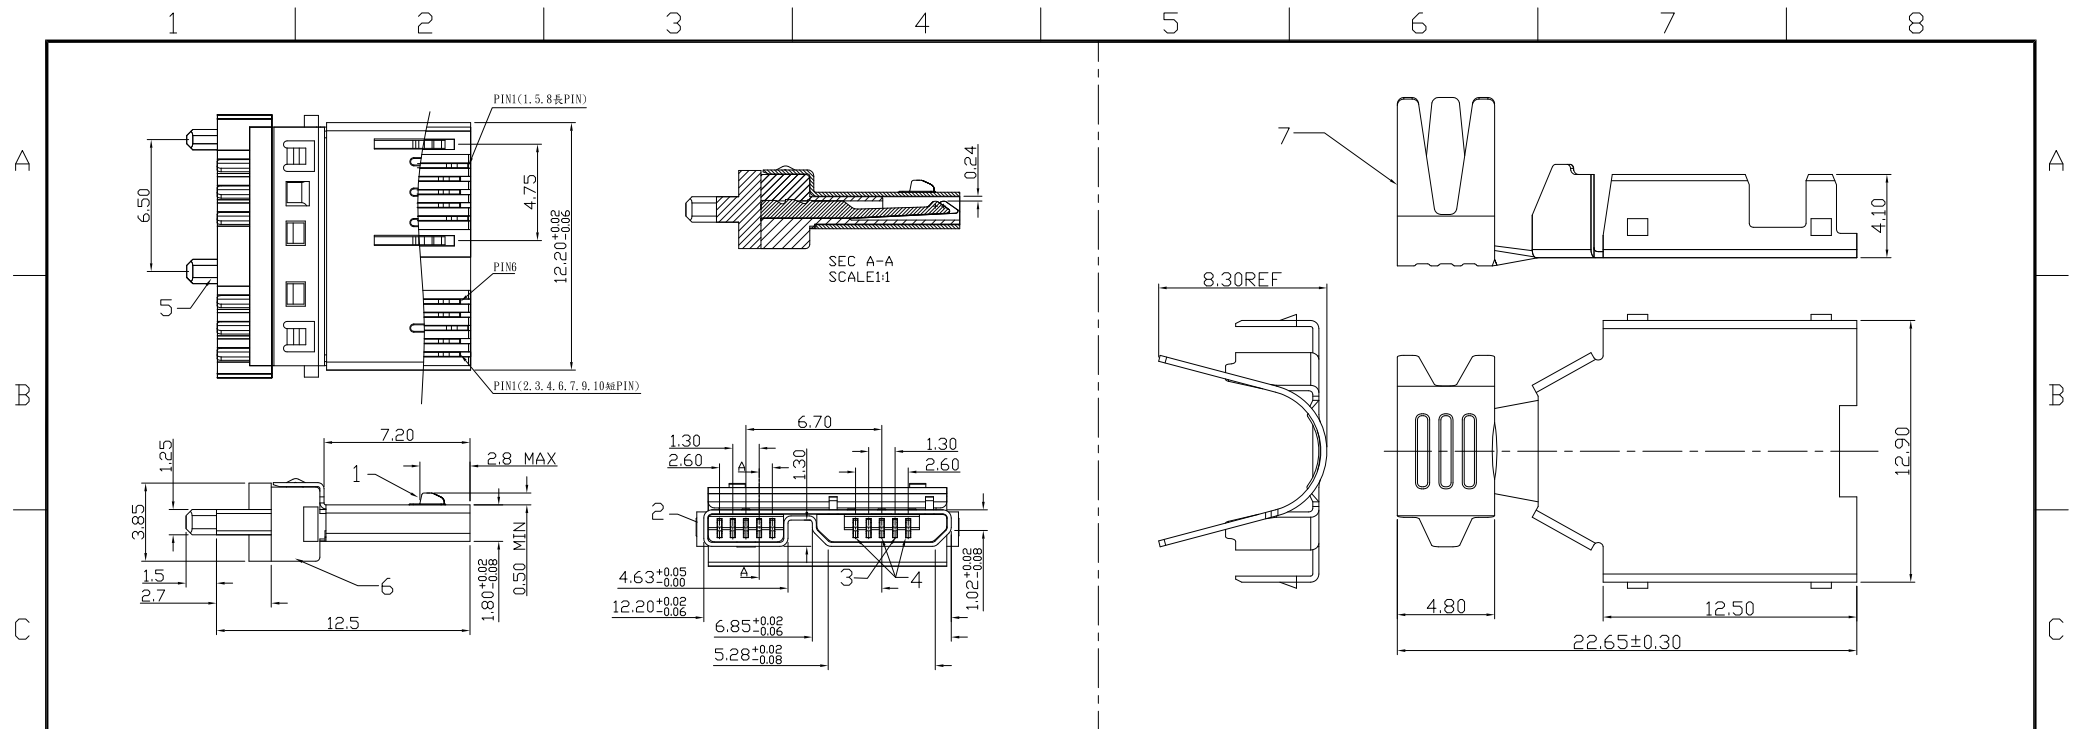

BOM:

8	USB3.0 MICRO-B公頭-下蓋	DP0900016-8	1	SPCC T=0.30MM FINISH: NICKEL PLATED
7	USB3.0 MICRO-B公頭-上蓋	DP0900016-7	1	SPCC T=0.30MM FINISH: NICKEL PLATED
6	膠芯	DP0900016-1	1	PA46 UL 94V-0
5	後塞	DP0900016-2	1	TEFLON UL 94V-0
4	外殼	DP0900016-3	1	SUS 304 T=0.20MM
3	卡扣	DP0900016-4	1	SUS 301 T=0.40MM
2	PIN A	DP0900016-5	6	磷銅C5210R-EH T=0.20MM 電鍍: SEE TABLE
1	PIN B	DP0900016-6	4	磷銅C5210R-EH T=0.20MM 電鍍: SEE TABLE
項次	品名	料號	數量	規格

NOTES:


Contact resistance: 50mΩ MAX.
Insulation resistance: 100MΩ MIN AT 500V DC.
Dielectric withstand: 100V AC
Electrical Characteristics: 30V DC/AC 1A MAX
Insert force: 35N MAX.
Extraction Force: 10N MIN.

TABLE1:

XX	電鍍	XX	電鍍
01	前金后錫	05	15u" 前金后錫
02	3u" 前金后錫	06	20u" 前金后錫
03	5u" 前金后錫	07	30u" 前金后錫
04	10u" 前金后錫		

TABLE:

Y	外殼電鍍
1	吃錫鎳
2	一般金
3	2U" 金
4	3u" 金

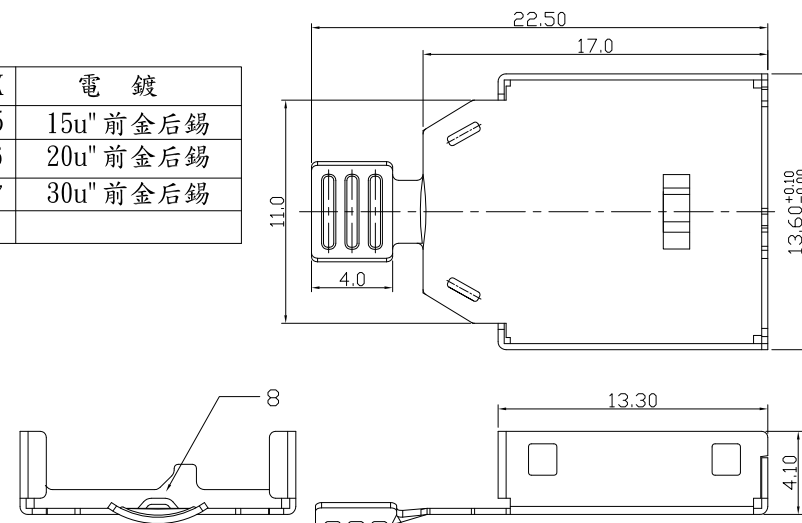

東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY 張黎林

CHECKED BY

APPROVED BY

ITEM


USB3.0 MICRO-B公頭

PART NO

DP0900016-XXY

TOLERANCE

ANGLE PROJECTION



X±0.2
XX±0.10
ANGLE±5°

UNIT

mm

SCALE

1:1

DATE

12/21/2011

REVISION



DESCRIPTION

修改圖面

DATE

12/21/2011

DATE