

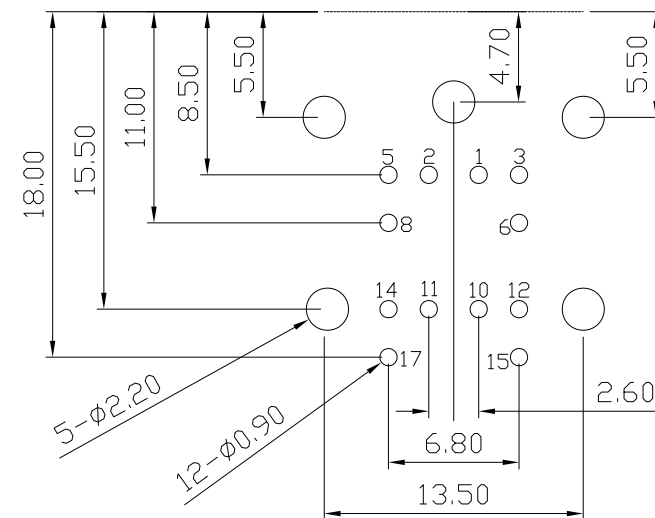


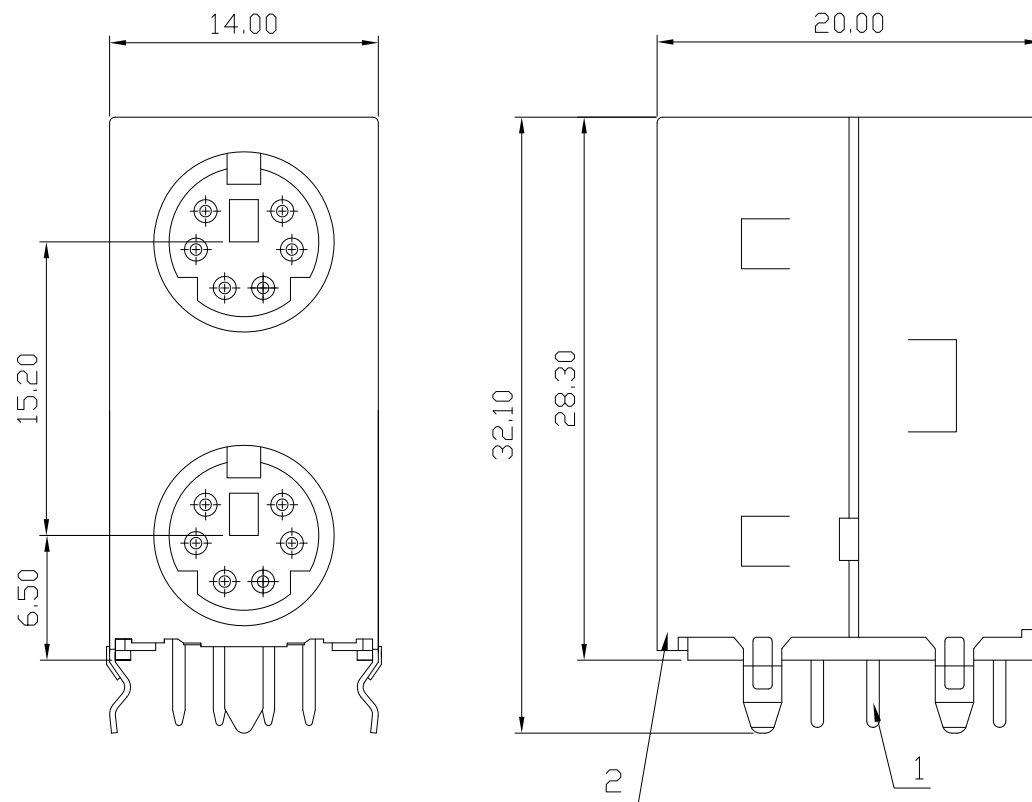

PCB LAYOUT
(BOTTOM VIEW)

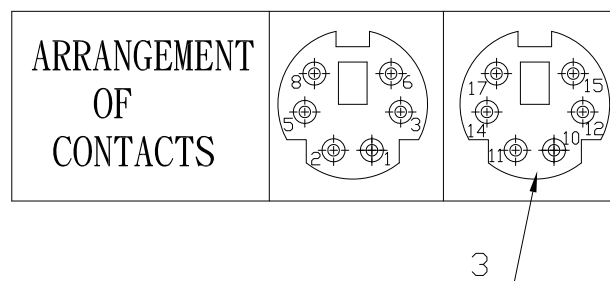

ELECTRICAL CHARACTERISTICS:
 RATING: 12 V DC 2 A MAX
 CONTACT RESISTANCE:
 50 mΩ MAX
 INSULATION RESISTANCE:
 100 MΩ MIN at 250 V DC
 DIELECTRIC STRENGTH:
 250V AC/1 minute

BOM:

3	INSULATOR	1	PBT+15%GF, UL 94 V-0
2	SHELL	1	BRASS, T=0.30±0.03MM. TIN OR NICKEL PLATED
1	PIN	6	PHOSPHOR BRONZE, T=0.20±0.03MM. G.F/TIN PLATED.
項次	名 稱	數量	規 格



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY		ITEM	6P PCB 90°雙層母座	ANGLE PROJECTION	UNIT	MM			
CHECKED BY					SCALE	2:1			
APPROVED BY		PART NO	DP0600005-1	TOLERANCE	X.XX±0.20	DATE	12/25/2001	REVISION	DESCRIPTION
						DATE	12/25/2001	REVISION	DESCRIPTION