
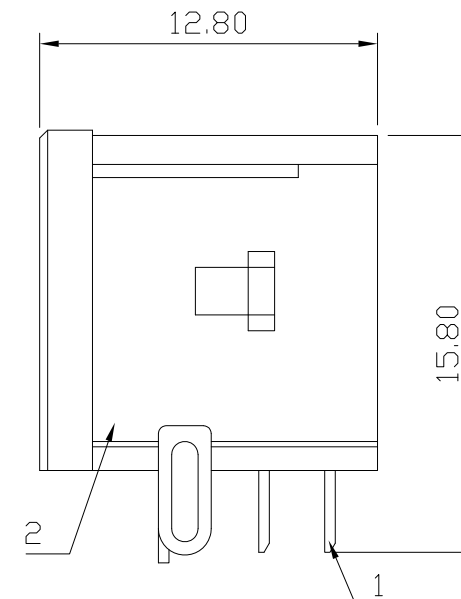


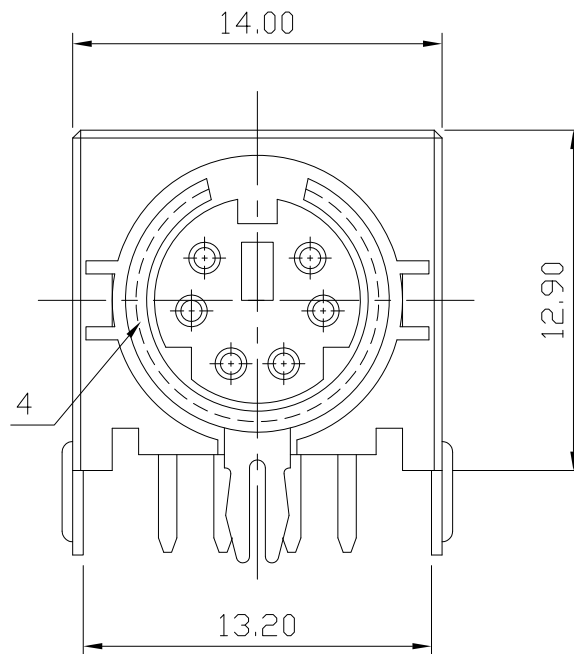

ELECTRICAL CHARACTERISTICS:

RATING:12 V DC 2 A MAX

CONTACT RESISTANCE:

50 mΩ MAX

INSULATION RESISTANCE:



100 MΩ MIN at 250 V DC

DIELECTRIC STRENGTH:

250V AC/1 minute

BOM:

5	塞 ?	1	PBT+15%GF,UL 94 V-0
4	接地管	1	BRASS,T=0.40±0.03MM. TIN OR NICKEL PLATED
3	膠 心	1	PBT+15%GF,UL 94 V-0
2	外 殼	1	BRASS,T=0.30±0.03MM. TIN OR NICKEL PLATED
1	PIN針	6	PHOSPHOR BRONZE,T=0.20±0.03MM. 3U" GOLD/TIN PLATED.
項次	名 稱	數量	規 格

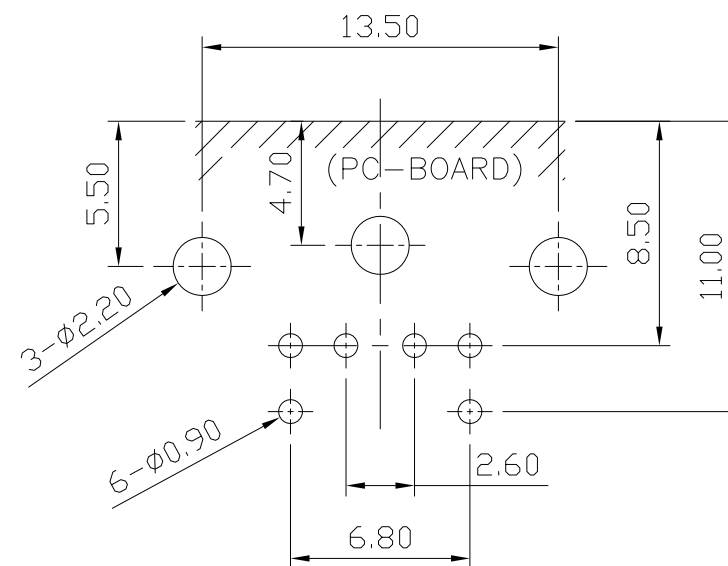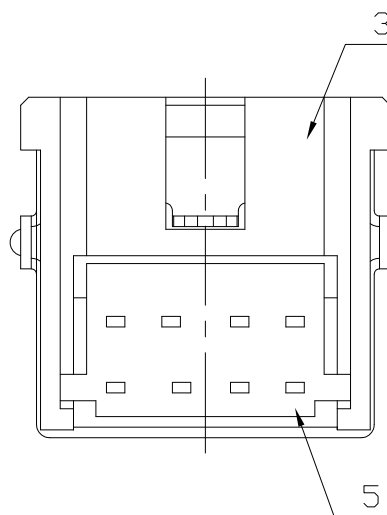

PCB Layout(Bottom View)



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY

CHECKED BY

APPROVED BY

ITEM

PART NO

6P PCB 90°
(MID COVER-TYPE)

DP06000008

TOLERANCE

ANGLE PROJECTION



X.XX±0.20

UNIT

SCALE

DATE

MM

2.5: 1

12/25/2001

REVISION

DESCRIPTION

DATE

DATE