


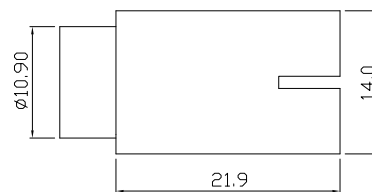



LM0260001-B

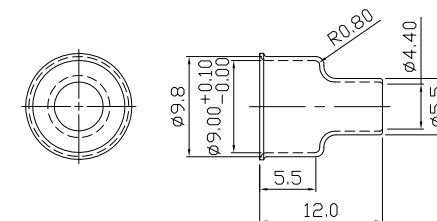



LM02709YY








LM0124501

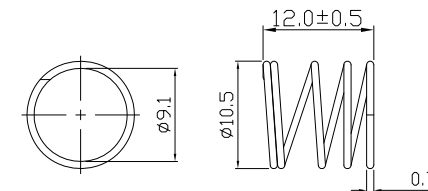

LM0110001



MD06025XX-U

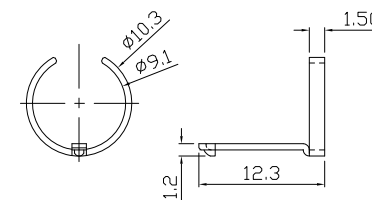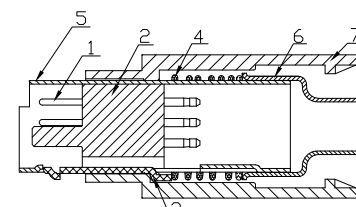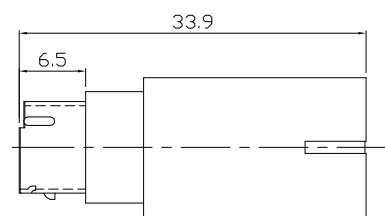

LM0120001

TABLE-3:

XX	PLATING
00	NICKEL PLATED
01	TIN PLATED

TABLE-2

YY	COLOR	YY	COLOR
00	淺灰	06	
01		07	
02		08	綠
03	米	09	紫
04	藍	10	銀灰
05	黑	11	

TABLE-1

XX	PLATING	05	GOLD PLATED 5u" MIN.
00	NICKEL PLATED.	06	GOLD PLATED 10u" MIN.
01	TIN PLATED.	07	GOLD PLATED 15u" MIN.
02	SILVER PLATED.	08	GOLD PLATED 20u" MIN.
03	GOLD FLASH PLATED.	09	GOLD PLATED 30u" MIN.
04	GOLD PLATED 3u" MIN.	10	GOLD PLATED 50u" MIN.

ELECTRICAL CHARACTERISTICS:
 1.RATING:100V AC 1A MAX OR.
 12V DC 2A MAX
 2.CONTACT RESISTANCE: 30mΩ MAX.
 3.INSULATION RESISTANCE: 50MΩ MIN at 250V DC.
 4.DIELECTRIC STRENGTH: 250V AC/1 minute.
 5.INSERTION FORCE: 4.5kgf MAX.
 6.WITHDRAWAL FORCE: 2.2kgf MIN.

BOM:

項次	名稱	料號	材質	電鍍或顏色	數量	備註
1	PIN	PI00157XX	BRASS	SEE TABLE-1	6	
2	成型膠心	MD06025XX-U	PBT+30%GF, UL 94 V-0	BLACK	1	
3	LOCK鋼圈	LM0120001	SUS301		1	
4	LOCK彈簧	LM0110001	琴鋼線(SWP-A)線徑0.70±0.05MM	NICKEL PLATED	1	
5	LOCK銅管(鋼圈型)	LM0260001-B	BRASS(1/2H) T=0.40±0.03MM	NICKEL PLATED	1	
6	LOCK后套(Ø4.4)	LM0124401	伸抽鐵	SEE TABLE-3	1	
7	LOCK外殼	LM02709YY	ABS, UL 94 V-0	SEE TABLE-2	1	



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY	豆秀品	ITEM	
CHECKED BY		PART NO	
APPROVED BY			

6P LOCK公頭	ANGLE PROJECTION	UNIT	MM
(雙箭+Mouse 鋼圈型 線徑Ø4.4)		SCALE	2:1
LM63409XX-6YY		DATE	03/21/2004
TOLERANCE		REVISION	

增加后套電鍍表	03/21/2004
DESCRIPTION	DATE