

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A


B

C


D

E


F

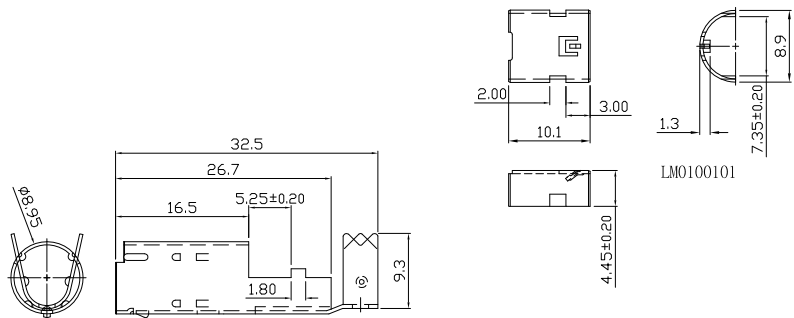


LM0100101




PR0166602






LM01700YY

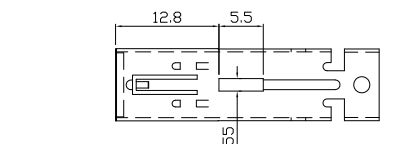



LM0320201





LM02700YY

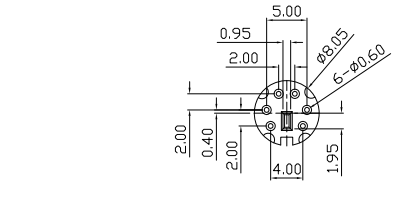


MD06025XX-U



LM0110001

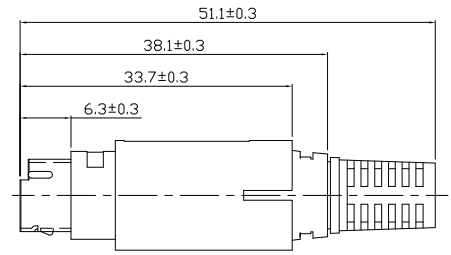

LM0100001

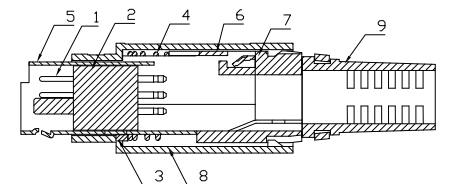

Build of material:

項次	名稱	料號	材質	電鍍或顏色	數量	備註
1	PIN	PI00157XX	BRASS	SEE TABLE-1	6	
2	成型膠心		PBT+30%GF, UL 94 V-0	BLACK	1	
3	塑鋼	LM0100001	塑膠鋼(POM M90#)	BLACK	1	
4	彈簧	LM0110001	琴鋼線(SWP-A)線徑ø0.70±0.05MM	NICKEL PLATED	1	
5	LOCK銅管-下蓋	LM0320201	BRASS, T=0.40±0.03MM	NICKEL PLATED	1	
6	LOCK銅管-上蓋	LM0100101	BRASS, T=0.40±0.03MM	NICKEL PLATED	1	
7	內膠殼	LM01700YY	PC, UL 94 V-0	SEE TABLE-2	1	
8	外殼	LM02700YY	ABS, UL 94 V-0	SEE TABLE-2	1	
9	SR 塑膠後套	PR0166602	PVC(35P 40P 45P 54P), UL 94 V-0	SEE TABLE-2	1	

ELECTRICAL CHARACTERISTICS:
 1.RATING:100V AC 0.5A MAX OR. 12V DC 1A MAX
 2.INSULATION RESISTANCE:50MΩ MIN at 250V DC.
 3.DIELECTRIC STRENGTH:250V AC/1 minute.
 4.CONTACT RESISTANCE:50mΩ MAX.
 5.INSERTION FORCE:4.5kgf MAX.
 6.WITHDRAWAL FORCE: 0.9kgf~4.0kgf.

TABLE-2

YY	COLOR	YY	COLOR
00	淺灰	06	
01	米	07	綠
02	藍	08	紫
03	黑	09	銀灰
04		10	
05		11	

TABLE-1

XX	PLATING	05	GOLD PLATED 5u" MIN.
00	NICKEL PLATED.	06	GOLD PLATED 10u" MIN.
01	TIN PLATED.	07	GOLD PLATED 15u" MIN.
02	SLLVER PLATED.	08	GOLD PLATED 20u" MIN.
03	GOLD FLASH PLATED.	09	GOLD PLATED 30u" MIN.
04	GOLD PLATED 3u" MIN.	10	GOLD PLATED 50u" MIN.

東莞世華電子有限公司
 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
 地址:東莞市塘廈鎮諸佛嶺178工業區
 TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 陳長江
 CHECKED BY
 APPROVED BY

ITEM 6P LOCK公頭 (八件式)
 PART NO LM65100XX-YY TOLERANCE .X±0.2 .XX±0.10

ANGLE PROJECTION UNIT MM
 SCALE 2:1 修正電性測試要求 06/19/2007
 DATE 06/19/2007 REVISION DESCRIPTION DATE

1 2 3 4 5 6 7 8