
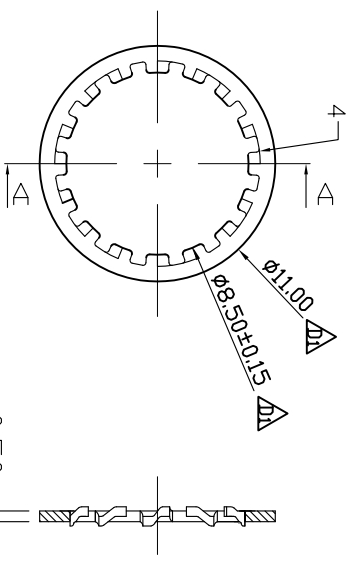
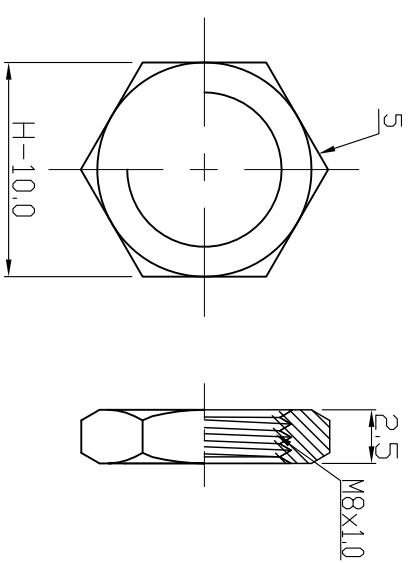
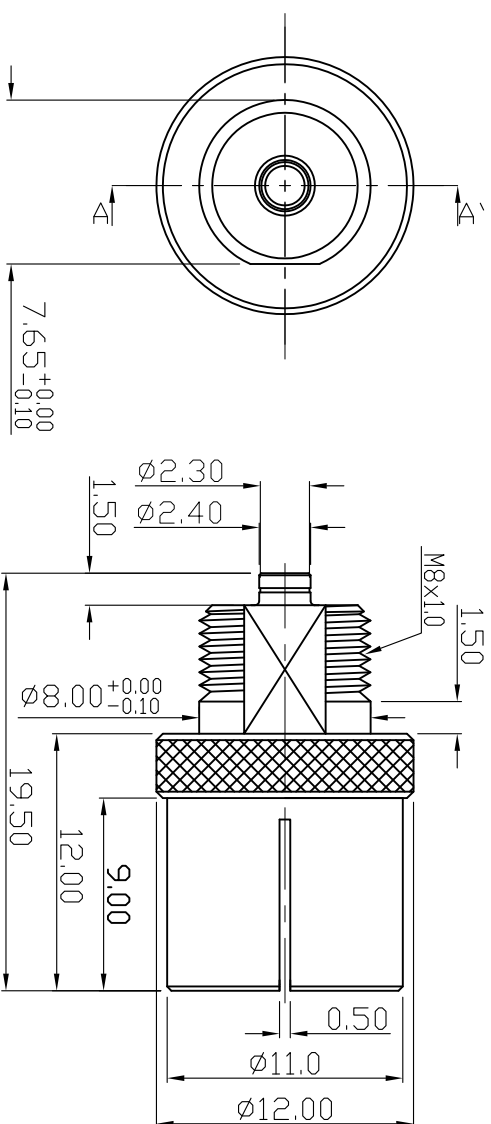


1. 插入力: 0.8kgf~3kgf;
2. 拔出力: 0.8kgf~3kgf;
3. Impedance: 75 ± 5 ohms;
4. Frequency Range: 0 to 1.0 GHz;
5. SWR: 2.00 max;
6. Attenuation: 3.0dB max.

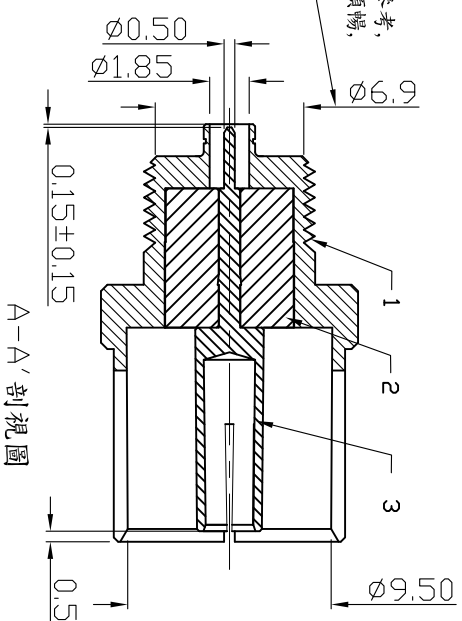

Build of material:

5	TYPE F PLUG ST線端-螺母	CD015962008-5	1	快鉗鉤 80-120u" NICKEL PLATED	車件 共用
4	TYPE F PLUG ST-整圈	CD015962008-6	1	螺絲 T=0.50 80-120u" NICKEL PLATED	車件 共用
3	H.FL ST. PLUG TO PAL ST. JACK ADAPTOR-中心針	CD015962012-2	1	烙鐵 10u" GOLD PLATED	車件
2	PAL JACK ST-膠心	CD015962009-2	1	TFEFLON	車件 共用
1	H.FL ST. PLUG TO PAL ST. JACK ADAPTOR-本體	CD015962012-1	1	快鉗鉤 80-120u" NICKEL PLATED	車件
項次	名稱	料號	數量	規格	備註

7



東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

DRAWN BY 王焱生

CHECKED BY

地址：東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-7910020-1 FAX: 0769-7910210

FAX: 0769-7910210

7

客戶要求加標尺寸

DESCRIPTION	DATE
-------------	------