
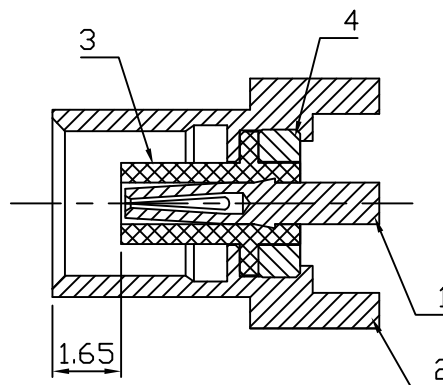
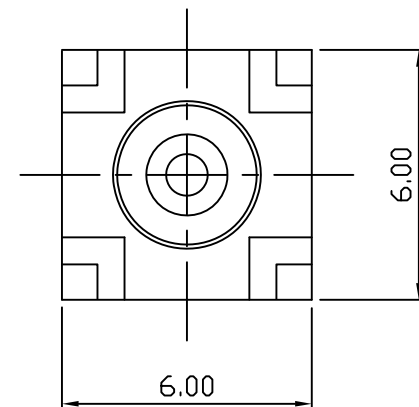
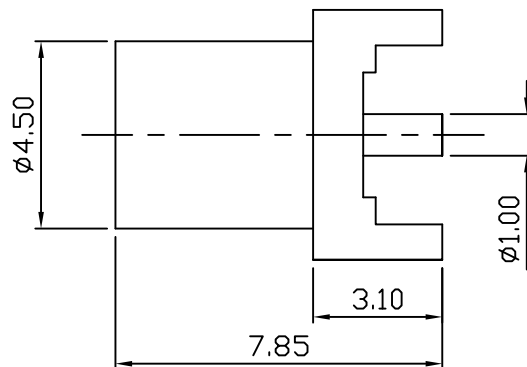


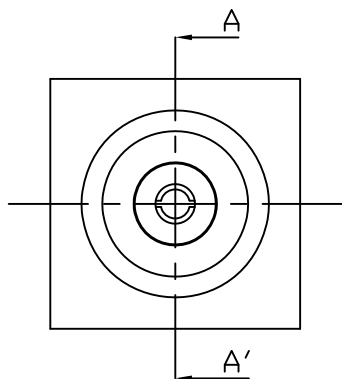

A-A' 剖面

ELECTRICAL CHARACTERISTICS:

IMPEDANCE:50 OHMS

FREQUENCY RANGE:0 TO 6GHz

WORKING VOLTAGE:

RG-178,196=250VRMS AT SEA LEVEL MAX.

RG-174,188,316=335VRMS SEA LEVEL MAX.

INSULATION RESISTANCE:1000 MEGOHMS MIN.

DIELECTRIC WITHSTANDING VOLTAGE:

RG-178,196=750 VOLTS RMS MIN.

RG-174,188,316=1000VOLTS RMS MIN.

CONTACT RESISTANCE:CENTER CONTACT:

5.0 MILLIOHMS MAX.

OUTER CONTACT:1.0 MILLIOHMS MAX.

VSWR:STRAIGHT CONNECTOR:

RG-178=1.07+0.06F(F IN GHz)

RG-174,188,316=1.07+0.04F(F IN GHz)

R/A CONNECTOR:RG-178=1.17+0.06F(F IN GHz)

RG-174,188,316=1.13+0.04F(F IN GHz)

BOM:

4	墊片	1	BRASS, 50u"GOLD PLATED.	
3	塞墊	1	TEFLON	
2	外殼	1	BRASS, 50u"GOLD PLATED.	
1	PIN針	1	BRASS, 30u"GOLD PLATED.	
項次	名稱	數量	規格	備註



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY

CHECKED BY

APPROVED BY

ITEM

PART NO

MCX 母頭

015902018

TOLERANCE

ANGLE PROJECTION



X.XX±0.20

UNIT

SCALE

DATE

MM

5:1

12/06/2002

REVISION

DESCRIPTION

DATE